



PARIFY
LIGHTING

LIGHT LINES: 2025

Exhibition & Retail In-Cabinet Collection

USING **LIGHT** CREATIVELY TO DRIVE **SALES**


www.parifylighting.co.uk




PARIFY
LIGHTING

CONTENTS

Mini Spot Light Series	01-04
Mini Recessed Light Series	04-07
Stalk Light Series	08-15
Bridge Light Series	16-17
Linear Spot Light Bar Series	18-19
Mini Track Light Series	19-26
Linear Light Series	27-28




Model: PAR101S
Wattage: 1W
Dimension: $\Phi 18.6 \times 22\text{mm}$
Head rotary: 360°
Voltage: DC12V/AC110-240V
Current: 350mA
LED Source: Osram LED
CCT: 700-6000k
Lumen: 100lm
CRI: Ra90
Beam angle: $15/40^\circ$
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black/gold





Model: PAR511
Wattage: 1W
Dimension: $\Phi 16 \times 26\text{mm}$
Voltage: AC110-240V
Current: 350mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 85lm
CRI: Ra80/90
Beam angle: $15/25/45^\circ$
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black/gold


Zoomable




Model: PAR102-1
Wattage: 2W
Head rotary: 360°
Voltage: DC12V/AC110-240V
Current: 500mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 200lm
CRI: Ra90
Beam angle: $6-60^\circ$
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black/gold
Installation: Screw fix




Model: Surface Mount PAR101-1
Wattage: 2W
Head rotary: 360°
Voltage: DC12V/AC110-240V
Current: 500mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 120-180lm
CRI: Ra80/93
Beam angle: 10/30/60°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black/gold
Installation: Screw fix or surface mounted




Model: Surface Mount PAR103-1
Wattage: 3W
Head rotary: 360°
Voltage: DC12V/AC110-240V
Current: 250mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 300-390lm
CRI: Ra80/93
Beam angle: 15/30/60°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black/gold
Installation: Screw fix or surface mounted



Model: Surface Mount PAR103S
Wattage: 3W
Dimension: $\Phi 32 \times 40$ mm
Cut size: $\Phi 10$ mm
Voltage: AC110-240V
Current: 350mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 300lm
CRI: Ra80
Beam angle: 15/25/45°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black
Installation: Screw fix or surface mounted




Model: Surface Mount PAR111-1
Wattage: 1W
Height: Custom made
Voltage: DC12V/24V/AC110-240V
Current: 300mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 80lm
CRI: Ra80/93
Beam angle: 25°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black/gold
Cut Size: Φ10mm

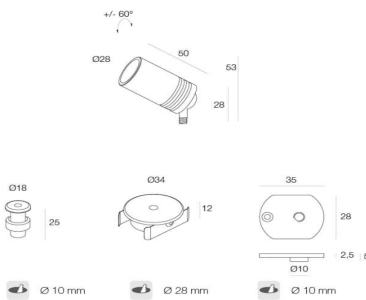


Model: Surface Mount PAR103A/B/C
Wattage: 3W
Head rotary: 360°
Voltage: DC12V/AC110-240V
Current: 250mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 295lm
CRI: Ra90
Beam angle: 15/25/45°
IP: IP20
Material: Aluminum
Shell color: Anodised silver/black
Installation: Recessed or surface mounted

Zoomable




Model: Surface Mount PAR115-1
Wattage: 3W
Dimension: Φ24*38mm
Cut size: Φ10mm
Voltage: DC12V/24V/AC110-240V
Current: 600mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 180lm
CRI: Ra90
Beam angle: 10-60°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black
Installation: Screw fix or surface mounted

Zoomable

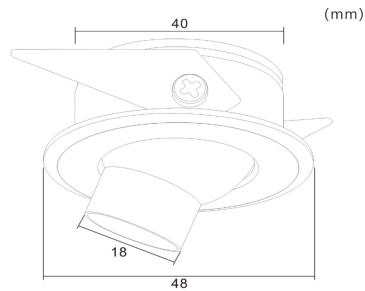


Model: Recessed PAR108
Wattage: 3W
Dimension: $\Phi 45 \times 40$ mm
Cut size: $\Phi 40$ mm
Voltage: AC110-240V
Current: 350mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 200lm
CRI: Ra80/93
Beam angle: 15-60° zoomable
IP: IP20
Material: Aluminum
Shell colour: Anodised black/silver
Installation: Recessed




Model: Recessed PAR108-1
Wattage: 3W
Dimension: $\Phi 48 \times 32$ mm
Cut size: $\Phi 40$ mm
Voltage: AC110-240V
Current: 600mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 150-200lm
CRI: Ra80/93
Beam angle: 15/25/45/60
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black/gold
Installation: Recessed


Zoomable



Model: Recessed PAR108-12
Wattage: 5W
Dimension: $\Phi 74 \times 70$ mm
Cut size: $\Phi 64$ mm
Voltage: AC110-240V
Current: 700mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 300-380lm
CRI: Ra80
Beam angle: 10-60° zoomable
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black
Installation: Recessed




Model: Recessed PAR108-3
Wattage: 2W
Dimension: $\Phi 42 \times 25$ mm
Cut size: $\Phi 36$ mm
Voltage: AC110-240V
Current: 350mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 200lm
CRI: Ra80/93
Beam angle: 45°
IP: IP20
Material: Aluminum
Shell colour: White/black
Installation: Recessed



Model: Recessed PAR108-4
Wattage: 1W
Dimension: $\Phi 22 \times 24$ mm
Cut size: $\Phi 18$ mm
Voltage: AC110-240V
Current: 350mA
LED Source: Cree LED
CCT: 2700-6000k
Lumen: 150lm
CRI: Ra90
Beam angle: 45°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black
Installation: Recessed




Model: Recessed PAR108-2
Wattage: 1W/3W/5W/7W Cut
size: $\Phi 30/40/50/60$ mm
Voltage: AC110-240V
LED Source: Osram
CCT: 2700-6000k
Lumen: 100lm/W
CRI: Ra90
Beam angle: 24°
IP: IP20
Material: Aluminum
Shell colour: Black/white
Installation: Recessed

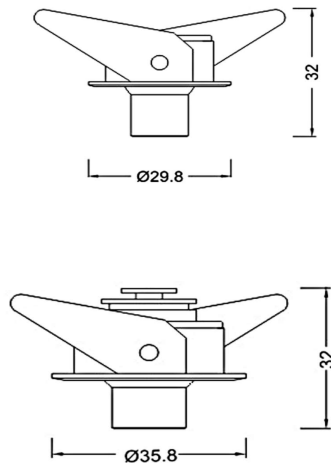


Model: Recessed PAR108-9
 Wattage: 1w
 Dimension: $\Phi 29.8 \times 32 / \Phi 35.8 \times 32$ mm
 Cut size: $\Phi 25 / \Phi 33$ mm
 Voltage: AC110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 75-90lm
 CRI: Ra80/93
 Beam angle: 30°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Recessed




Model: Recessed PAR108-10
 Wattage: 3W
 Dimension: $\Phi 48 \times 55$ mm
 Cut size: $\Phi 40$ mm
 Voltage: AC110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 80-100lm
 CRI: Ra80/93
 Beam angle: 5/15/25/45°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Recessed

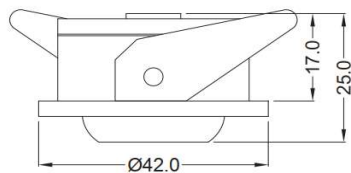


Model: Recessed 108-11
 Wattage: 1W
 Dimension: $\Phi 38.8 \times 23.1$ mm
 Cut size: $\Phi 38$ mm
 Voltage: AC110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 70-90lm
 CRI: Ra80/93
 Beam angle: 15/25/45°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Recessed



Model: Recessed PAR108-6
 Wattage: 3W
 Dimension: $\Phi 52 \times 33$ mm
 Cut size: $\Phi 45$ mm
 Voltage: AC110-240V
 Current: 600mA
 LED Source: Osram LED
 CCT: 2700-6000K
 Lumen: 150-200lm
 CRI: Ra80/93
 Beam angle: 15/25/45°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/white
 Installation: Recessed




Model: Recessed PAR108-7
 Wattage: 3W
 Dimension: $\Phi 52 \times 33$ mm
 Cut size: $\Phi 45$ mm
 Voltage: AC110-240V
 Current: 250mA
 LED Source: Osram LED
 CCT: 2700-6000K
 Lumen: 300-390lm
 CRI: Ra80/93
 Beam angle: 15 30 60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black
 Installation: Recessed



Model: Recessed PAR108-13
 Wattage: 1W
 Dimension: $\Phi 45 \times 35$ mm
 Cut size: $\Phi 40$ mm
 Voltage: AC110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000K
 Lumen: 90-120lm
 CRI: Ra80/93
 Beam angle: 15/25/45°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black
 Installation: Recessed



Model:Stalk PAR102
 Wattage:1W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120-180lm
 CRI:Ra80/93
 Beam angle:15/40°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/chrome
 Cut hole:Φ10mm

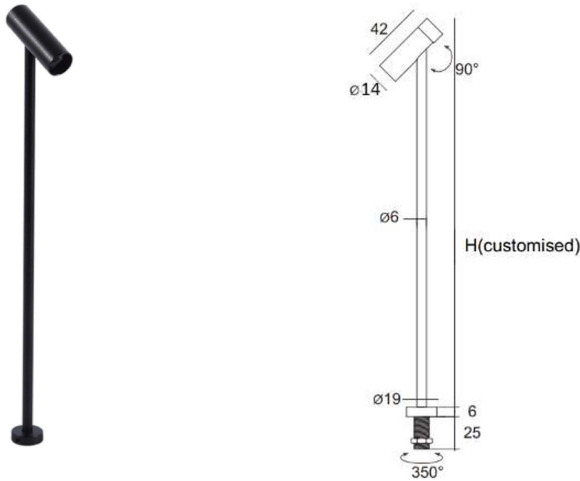


Model:Stalk PAR101A
 Wattage:1W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:110-120lm
 CRI:Ra80/93
 Beam angle:30°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ10mm




Model:W103D
 Wattage:3W
 Height:custom made
 Voltage:AC110-240V
 Current:250mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:300-390lm
 CRI:Ra80/93
 Beam angle:15/30/60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ12mm

Zoomable




Model:Stalk PAR111
Wattage:1W
Height:Custom made
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:90lm
CRI:Ra80/93
Beam angle:10-60°zoomable
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black
Cut hole:Φ11mm

Zoomable

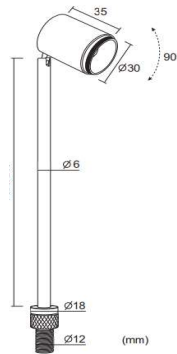


Model:Stalk PAR113
Height:Custom made
Voltage:AC110-240V
Current:600mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:180lm
CRI:Ra80/93
Beam angle:10-60°zoomable
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black
Cut hole:Φ13mm


Zoomable

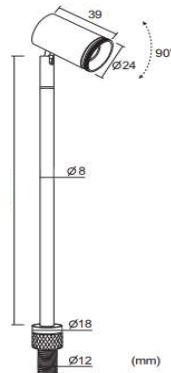


Model:Stalk PAR115
Wattage:3W
Height:custom made
Voltage:AC110-240V
Current:600mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:175lm
CRI:Ra80/93
Beam angle:10-60°zoomable
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ13mm

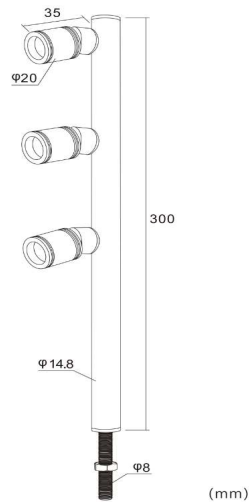


Model:Stalk PAR112B
Wattage:2-10W
Height:Custom made
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:120lm/Head
CRI:Ra80/93
Beam angle:25/45°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ8mm




Model:Stalk PAR112A
Wattage:2-10W
Height:Custom made
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-8000k
Lumen:120lm/Head
CRI:Ra80/93
Beam angle:25/45/60°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ10mm

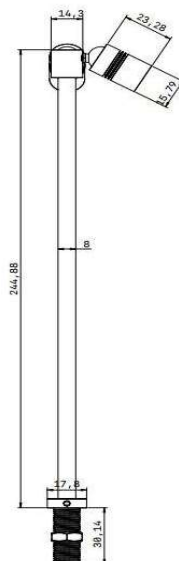


Model:Stalk PAR101B
Wattage:2W
Height:Custom made
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:120lm/Head
CRI:Ra80/93
Beam angle:25/45°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ10mm

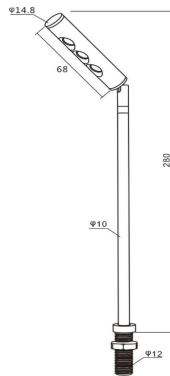


Model:Stalk PAR120A
Wattage:3W
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:330-390lm
CRI:Ra80/93
Beam angle:25/45°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ12mm




Model:Stalk PAR120B
Wattage:6*0.5W 3W
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:200-300lm
CRI:Ra80/93
Beam angle: 60°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ12mm




Model:Stalk PAR120C
Wattage:3W
Dimension:Φ6*250-400mm or custom made
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:200lm
CRI:Ra83
Beam angle:120°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black
Cut size:Φ10mm

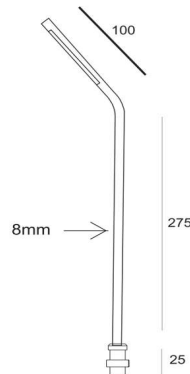

Model:Stalk PAR120F
Wattage:3W
Height:300mm or custom made
Voltage:AC110-240V
Current:300mA
LED Source:Osram SMD
CCT:2700-6000k
Lumen:220-280lm
CRI:Ra80/93
Beam angle:60°
IP:IP20
Material:Aluminum
Shell colour:Anodised Black
Cut size:Φ10mm

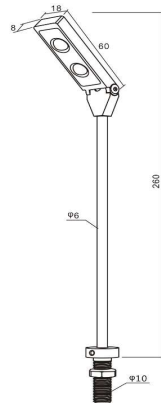

Model:Stalk PAR122A
Wattage:2W/3W
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:200-300lm
CRI:Ra80/93
Beam angle:25/45°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ10mm

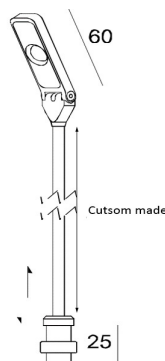

Model:Stalk PAR122C
Wattage:3W
Height:Custom made
Voltage:AC110-240V
Current:650mA
LED Source:Cree COB LED
CCT:2700-6000k
Lumen:300lm
CRI:Ra80/90
Beam angle: 60°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ10mm




Dia14.3mm




Custom made height


Model:Stalk PAR016D
Wattage:3W
Dimension:Φ14.3*300mm or custom made
Voltage:DC12V
LED Source:Osram LED
CCT:2700-6000k
Lumen:330-390lm
CRI:Ra80/93
Beam angle:60°
IP:IP20
Material:Aluminum
Shell colour:Silver/Black/Gold
Cut size:Φ10mm




Model:Stalk PAR901
Wattage:2W/Head
Dimension:Φ24mm
Voltage:AC110-240V
Current:500mA
LED Source:Osram LED
CCT:3000K/4000K/5000K
Lumen:120lm/Head
CRI:Ra90
Beam angle:45°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black
Cut size:Φ10mm




Model:Stalk PAR120D
Wattage:3W
Dimension:Φ10mm*300mm or custom made
Voltage:AC110-240V
Current:300mA
LED Source:Osram SMD
CCT:2700-6000k
Lumen:220-280lm
CRI:Ra80/93
Beam angle:45°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ12mm




Model:Stalk PAR112G
Wattage:2-10W
Height:Custom made
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:120lm/Head
CRI:Ra80/93
Beam angle:25//45°
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ10mm

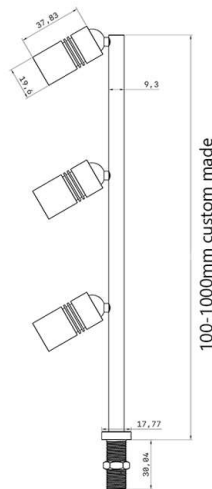


Model:Stalk PAR112H
Wattage:2-10W
Height:Custom made
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:120lm/Head
CRI:Ra80/93
Beam angle:25/45°
Material:Aluminum
Shell colour:Anodised silver/black/gold
Cut size:Φ10mm



Model:Stalk PAR112M
Wattage:2-0W
Height:Custom made
Voltage:AC110-240V
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:120lm/Head
CRI:Ra80/93
Beam angle:25//45°
Material:Aluminum
Shell color:Anodised silver/black/gold
Cut size:Φ10mm




Model:Stalk PAR122E
Wattage:4W
Voltage:AC110-240V
Current:300mA
Height:Custom made
LED Source:Cree COB
CCT:2700-5000k
Lumen:400lm
CRI:Ra80/93
Beam angle:60°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black Cut size:Φ10mm

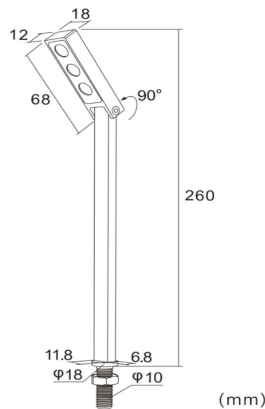


Model:Stalk PAR122B
Wattage: 3W/5W
Voltage:AC110-240V
Current:300mA
Height:Custom made
LED Source:Osram LED
CCT:2700-6000k
Lumen:120lm/W
CRI:Ra80/93
Beam angle:25/45/60
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold Cut size:Φ10mm


Zoomable





Model:Stalk PAR102
Wattage:3W Zoomable
Voltage:AC110-240V
Height:Custom made
Current:300mA
LED Source:Osram LED
CCT:2700-6000k
Lumen:120-180lm
CRI:Ra80/93
Beam angle:8-60°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black/gold Cut size:Φ12mm




Model: Bridge 016
 Wattage: 16W/Meter
 Voltage: DC12V/DC24V
 PC cover: Milky/clear
 Length: Custom made
 Height: Custom made
 LED Source: Osram SMD
 CCT: 2700-8000k
 Lumen: 100lm/Wattage
 CRI: Ra80/93
 Beam angle: 90°
 IP: IP20
 Rotary: 360°
 Material: Aluminum/PC
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted

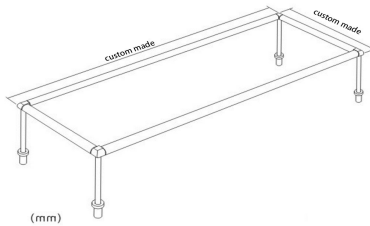


Model: Round Corner Bridge 016A
 Wattage: 16W/Meter
 Voltage: DC12V/DC24V
 PC cover: Milky/clear
 Length: Custom made
 Height: Custom made
 LED Source: Osram SMD
 CCT: 2700-8000k
 Lumen: 100lm/Wattage
 CRI: Ra80/93
 Beam angle: 90°
 IP: IP20
 Rotary: 360°
 Material: Aluminum/PC
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix

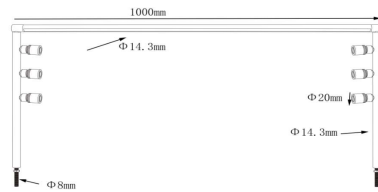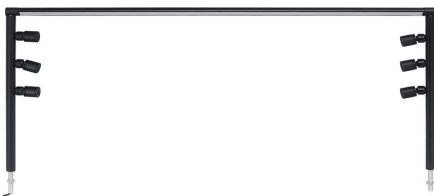



Model: Bridge 016B
 Wattage: 24W/Meter
 Voltage: DC12V/AC110-240V
 PC cover: Milky/clear
 Length: Custom made
 Height: Custom made
 LED Source: Osram SMD
 CCT: 2700-8000k
 Lumen: 100lm/Wattage
 CRI: Ra80/93
 Beam angle: 90°
 IP: IP20
 Rotary: 360°
 Material: Aluminum/PC
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted



Model: Bridge 019
Wattage: 16W/Meter
Profile size: Ø12mm
Voltage: DC12V
Height: Custom Made
LED Source: 210PCS SMD
CCT: 3000-6000k
Lumen: 100lm/Watt
CRI: Ra80/93
Beam angle: 60°
IP: IP20
Material: Aluminum
Rotary: 350°
Shell colour: Anodised silver/black/gold

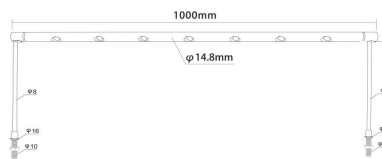


Model: Bridge 522
Wattage: 14W/Meter
Profile size: Ø14.8mm
Voltage: DC24V/AC110-240V
Length: Max 1200mm
Height: Custom Made
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 1400-1680lm
CRI: Ra80/93
Beam angle: 25/45/60°
IP: IP20
Material: Aluminum
Rotary: 360°
Shell colour: Anodised silver/black/gold
Installation: Screw fix/surface mounted

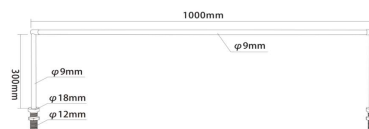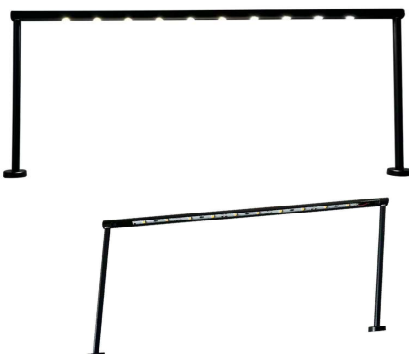


Model: Bridge 523
Wattage: 14W/Meter or 16W/Meter
Profile size: Ø9mm
PC: Clear or milky diffuser
Voltage: DC12V/AC110-240V
Length and height: Custom made
LED Source: Osram SMD
CCT: 2700-6000k
Lumen: 100lm/W
CRI: Ra80/93
Beam angle: 45°
IP: IP20
Material: Aluminum
Rotary: 360°
Shell colour: Anodised silver/black/gold
Installation: Screw fix/surface mounted


LINEAR SPOT LIGHT BAR SERIES

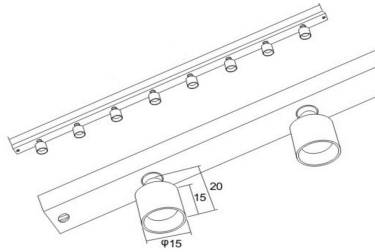

Model: Linear Spot 533-U
 Wattage: 2W-20W
 Aluminum profile: 11*11mm
 Voltage: DC24V/AC110-240V
 Length: 150-2000mm
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/Head
 CRI: Ra80/93
 Beam angle: 25/45/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted

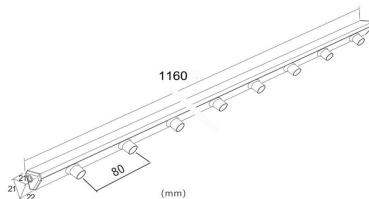

Model: Linear Spot 533-V
 Wattage: 2W-20W
 Voltage: DC24V/AC110-240V
 Length: 150-2000mm
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/Head
 CRI: Ra80/93
 Beam angle: 25/45/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted

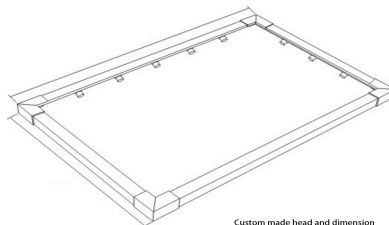


Model: Linear Spot 530
 Wattage: 2W-20W
 Voltage: DC24V/AC110-240V
 Dimension: custom made
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/Head
 CRI: Ra80/93
 Beam angle: 25/45/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted


LINEAR SPOT LIGHT BAR SERIES



Model: Linear Spot 150
 DC-end Spot light
 Head Dimension: Dia15*43mm Aluminum
 Profile Dimension: 26*25mm Aluminum
 Length: Custom made
 Voltage: DC5V
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 80lm/Head
 CRI: Ra80/93
 Beam angle: 30°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted



Model: Linear Spot 532-U
 Wattage: 2W-20W
 Aluminum profile: 24*12mm
 Voltage: DC24V/AC110-240V
 Length: 150-2000mm
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/Head
 CRI: Ra80/93
 Beam angle: 25/45/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted




Model: Linear Spot 532-V
 Wattage: 8W
 Voltage: DC24V/AC110-240V
 Dimension: 500mm
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/Head
 CRI: Ra80/93
 Beam angle: 25/45/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted




Model: Mini-Track U-Trak
Size: 14*11mm
Length: 300-2000mm
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black



Model: Mini-Track V-Trak
Size: 15.5*15.5mm
Length: 300-2000mm
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black




Model: Mini-Trak 101-2
 Wattage: 2W
 Head rotary: 355°
 Voltage: DC12V/DC24V Non-dimmable
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 120-180lm
 CRI: Ra80/93
 Beam angle: 15/30/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black




Model: Mini Trak 103-2
 Wattage: 3W
 Head rotary: 355°
 Voltage: DC12V/DC24V Non-dimmable
 Current: 250mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 200-300lm
 CRI: Ra80/93
 Beam angle: 15/30/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black


Zoomable




Model: Mini-Trak 102-2
 Wattage: 2W
 Head rotary: 355°
 Voltage: DC12V/DC24V Non-dimmable
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 120-150lm
 CRI: Ra80/93
 Beam angle: 8-60° zoomable
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black



Model: Mini-Trak 106-2
Wattage: 1W
Head rotary: 355°
Voltage: DC12V/DC24V Non-dimmable
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 80lm
CRI: Ra80/93
Beam angle: 15/25/45°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black




Model: Mini-Trak 100-2
Wattage: 1W
Head rotary: 355°
Voltage: DC12V/DC24V
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 80lm
CRI: Ra80/93
Beam angle: 15/25/45°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black




Model: Mini-Trak 110-2
Wattage: 3W
Head rotary: 355°
Voltage: DC12V/DC24V Non-dimmable
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 165lm
CRI: Ra80/93
Beam angle: 15/25/45°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black

Zoomable




Model: Mini-Trak 111-2
Wattage:1W
Head rotary:355°
Voltage:DC12V/DC24V Non-dimmable
LED Source:Osram LED
CCT:2700-6000k
Lumen:80lm
CRI:Ra80/93
Beam angle:10-60°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black

Zoomable




Model: Mini-Trak 115-2
Wattage:3W
Head rotary:355°
Voltage:DC12V/DC24V Non-dimmable
LED Source:Osram LED
CCT:2700-6000k
Lumen:175lm
CRI:Ra80/93
Beam angle:10-60°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black


Zoomable




Model: Mini-Trak 113-2
Wattage:3W
Head rotary:355°
Voltage:DC12V/DC24V Non-dimmable
LED Source:Osram LED
CCT:2700-6000k
Lumen:180lm
CRI:Ra80/93
Beam angle:10-60°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black

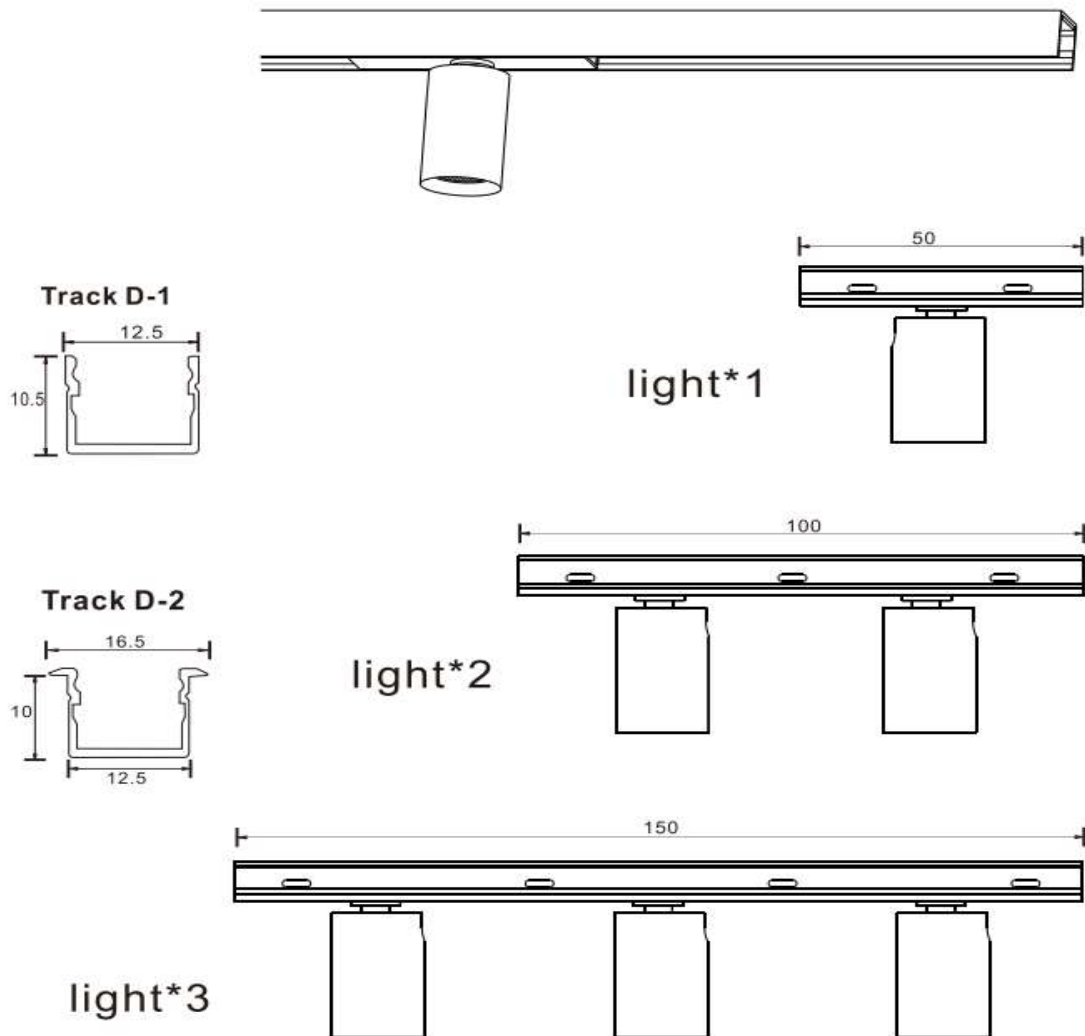


MICRO-LINE TRACK LIGHT SERIES



Model: Micro-Line Trak 10-00
 Wattage: 1W
 Head rotary: 355°
 Voltage:
 DC12-24V non-dimmable
 DC24V Dimmable
 CCT: 3000K/4000K/6000K
 Lumen: 80lm
 SDCM < 3
 CRI: Ra95
 Beam angle: 10/15/25/45°
 IP: IP20
 Dimmable: PWM/0-10V/Dali
 Material: Aluminum
 Shell colour: Anodised silver/black




Model: Micro-Line Trak 10-01
 Wattage: 1.5W
 Head rotary: 355°
 Voltage:
 DC12-24V non-dimmable
 DC24V Dimmable
 CCT: 3000K/4000K/6000K
 Lumen: 120lm
 SDCM < 3
 CRI: Ra95
 Beam angle: 15/25/45°
 IP: IP20
 Dimmable: PWM/0-10V/Dali
 Material: Aluminum
 Shell colour: Anodised silver/black

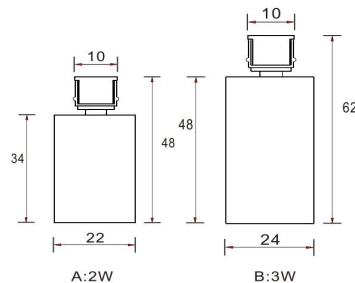


Model: Micro-Line Trak 10-02
 Wattage: 2W/3W
 Head rotary: 355°
 Voltage:
 DC12-24V non-dimmable
 DC24V Dimmable
 CCT: 3000K/4000K/6000K
 Lumen: 250lm
 SDCM < 3
 CRI: Ra95
 Beam angle: 5/15/25/45°
 IP: IP20
 Dimmable: PWM/0-10V/Dali
 Material: Aluminum
 Shell colour: Anodised silver/black


MICRO-LINE TRACK LIGHT SERIES





Model: Micro-Line Trak 10-04
 Wattage: 5W
 Head rotary: 355°
 Voltage:
 DC12-24V Non-dimmable DC24V Dimmable
 CCT: 3000K/4000K/6000K
 Lumen: 450lm
 SDCM < 3
 CRI: Ra95
 Beam angle: 5/15/25/45°
 IP: IP20
 Dimmable: PWM/0-10V/Dali
 Material: Aluminum
 Shell colour: Anodised silver/black




Model: Micro-Line Trak 10-03
 Wattage: 3.5W
 Head rotary: 355°
 Voltage:
 DC12-24V non-dimmable DC24V Dimmable
 CCT: 3000K/4000K/6000K
 Lumen: 300lm
 SDCM < 3
 CRI: Ra95
 Beam angle: 5/15/25/45°
 IP: IP20
 Dimmable: PWM/0-10V/Dali
 Material: Aluminum
 Shell colour: Anodised silver/black




Model: Micro-Line Trak 10-06
 Wattage: 3W
 Head rotary: 355°
 Voltage:
 DC12-24V non-dimmable DC24V Dimmable
 CCT: 3000K/4000K/6000K
 Lumen: 250lm
 SDCM < 3
 CRI: Ra95
 Beam angle: 5-60°
 IP: IP20
 Dimmable: PWM/0-10V/Dali
 Material: Aluminum
 Shell colour: Anodised silver/black

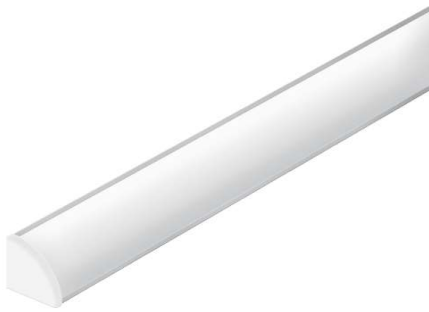


Model: Linear 2301
 Size: 16*16mm/8*8mm
 Length: 200-2000mm Custom made
 Voltage: DC12V/DC24V
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/W
 CRI: Ra80/93
 Beam angle: 120°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black




Model: Linear 2302
 Size: 10*10mm
 Length: 200-2000mm Custom made
 Voltage: DC12V/DC24V
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/W
 CRI: Ra80/90
 Beam angle: 120°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black




Model: Linear 2303
 Size: 13*9mm
 Length: 200-2000mm Custom made
 Voltage: DC12V/DC24V
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/W
 CRI: Ra80/90
 Beam angle: 120°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black



Model: Linear 2301U
 Size: 14*11.5mm
 Length: 200-2000mm Custom made
 Voltage: DC12V/DC24V/AC110V LED
 Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/W
 CRI: Ra80/93
 Beam angle: 90°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black



Model: Linear 016C
 Profile Size: Ø15mm
 Length: 200-2000mm Custom made
 Voltage: DC12V/DC24V/AC110V LED
 Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/W
 CRI: Ra80/90
 Beam angle: 90°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold

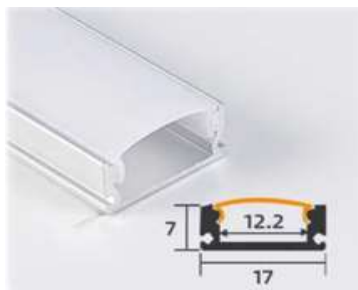

Model: Linear 2304
 Size: 17*7mm
 Length: 200-2000mm Custom made
 Voltage: DC12V/DC24V/AC110V LED
 Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/W
 CRI: Ra80/90
 Beam angle: 120°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black

Award-Winning Lighting

Parify Lighting Ltd

14, The Courtyard, Whitwick Business Park,
Stenson Road, Coalville, Leicester,
Leicestershire,
LE67 4JP

Tel: 01509 323 111

Email: sales@parify.co.uk

Web: parifylighting.co.uk

