


iLightsIn: Pro User Guide

For use with **ActivWhite** Lighting



PARIFY
LIGHTING

Gateway Connection

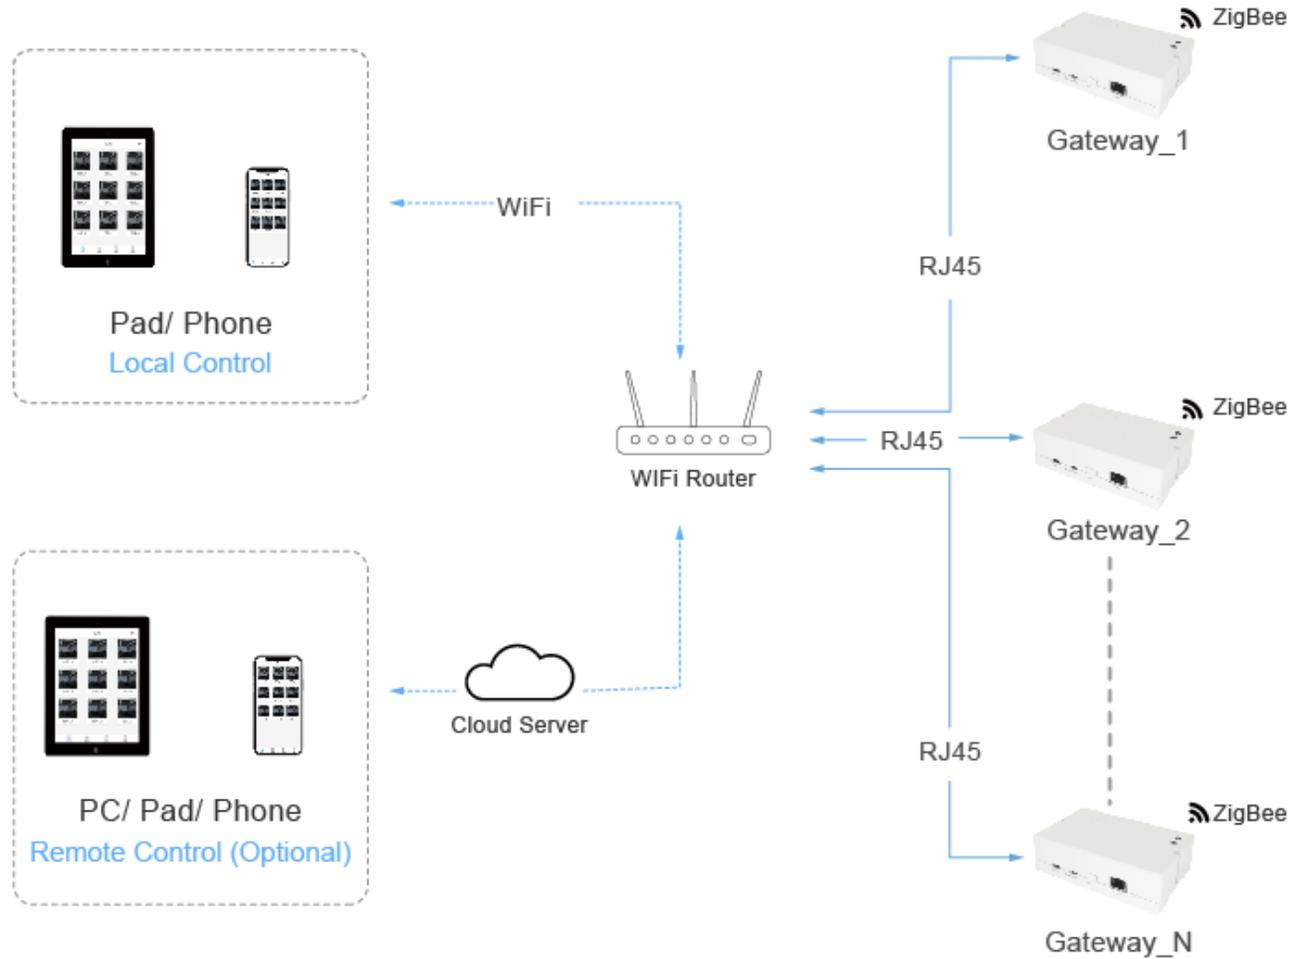

- ◆ Prepare a Router.
- ◆ Power on gateway and router.
- ◆ Connect router and gateway with a network cable.
- ◆ The network cable at one end of the router is plugged into the LAN port of the router, not the WAN port.
- ◆ Wait for the gateway indicator to turn green.

APP Login

4G+ 4G+ 14:18

4.80 67

Welcome to iLightsin Pro



Gateway detected:
Gateway



Admin



.....



Login




Remember

[Search Gateway](#)

v4.0.0




- ◆ Download "iLightsin Pro" in APP Store.
- ◆ Make sure the phone/tablet and gateway are connected to the same LAN network.
- ◆ Open the app, agree to the prompted permissions.
- ◆ Default Admin user name/ password: Admin/ 00000000.
- ◆ Click "Search Gateway" in App.

Search Gateway

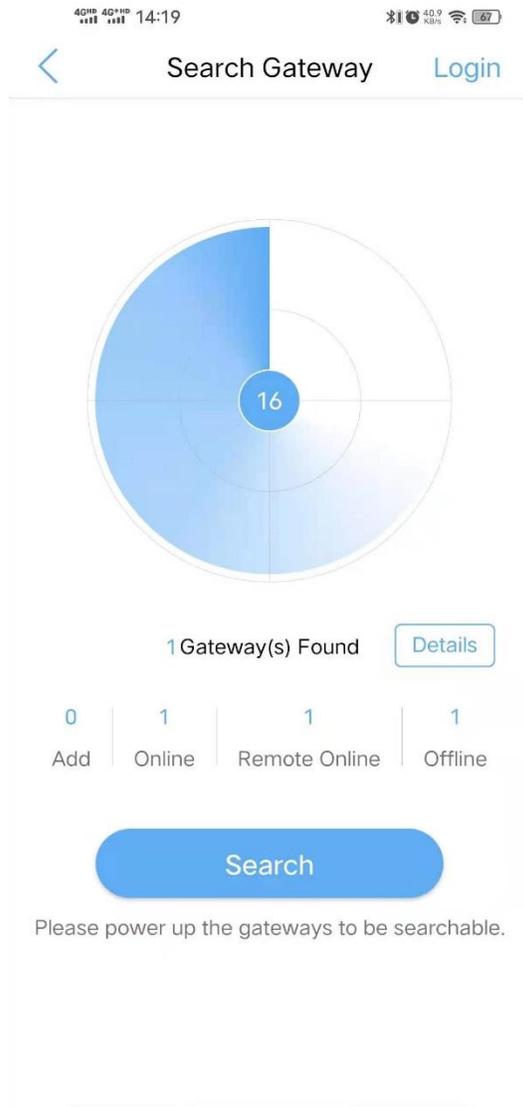


- ◆ Click the "Search" button.
- ◆ As long as the gateway and the mobile phone are in the same LAN, the gateway can be found by searching.
- ◆ After search is done, click the back button in top left corner. Login by default Admin user name and password.

Add Device

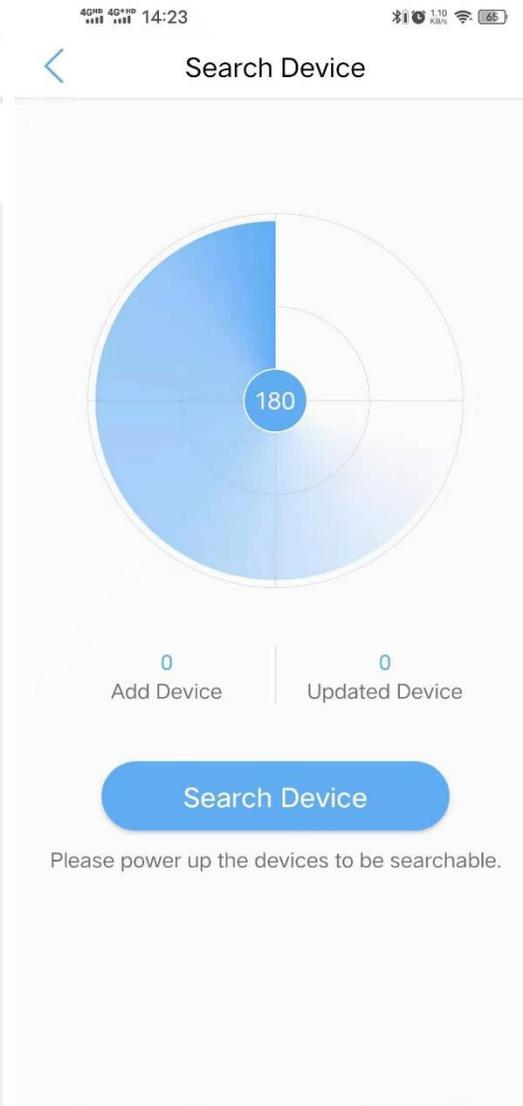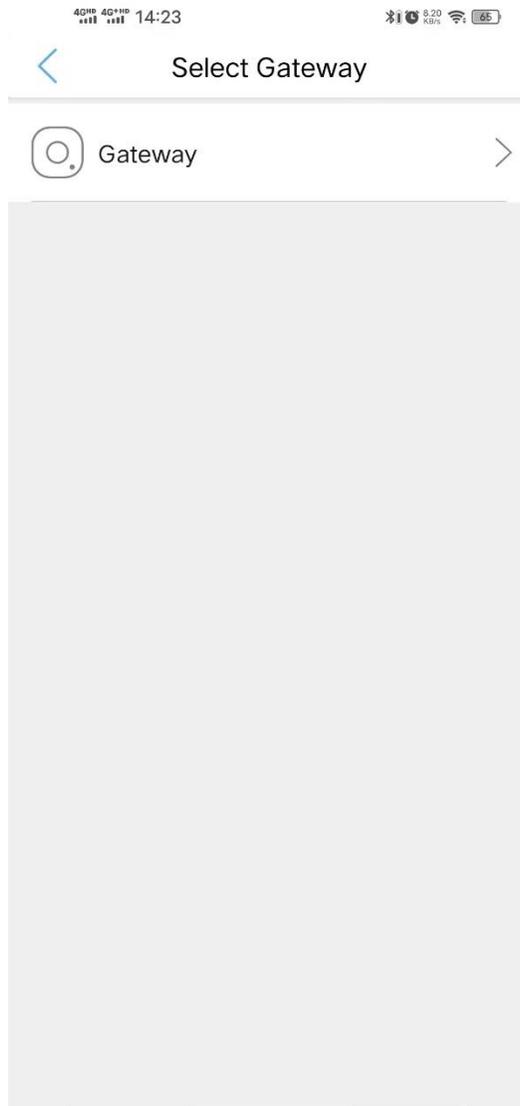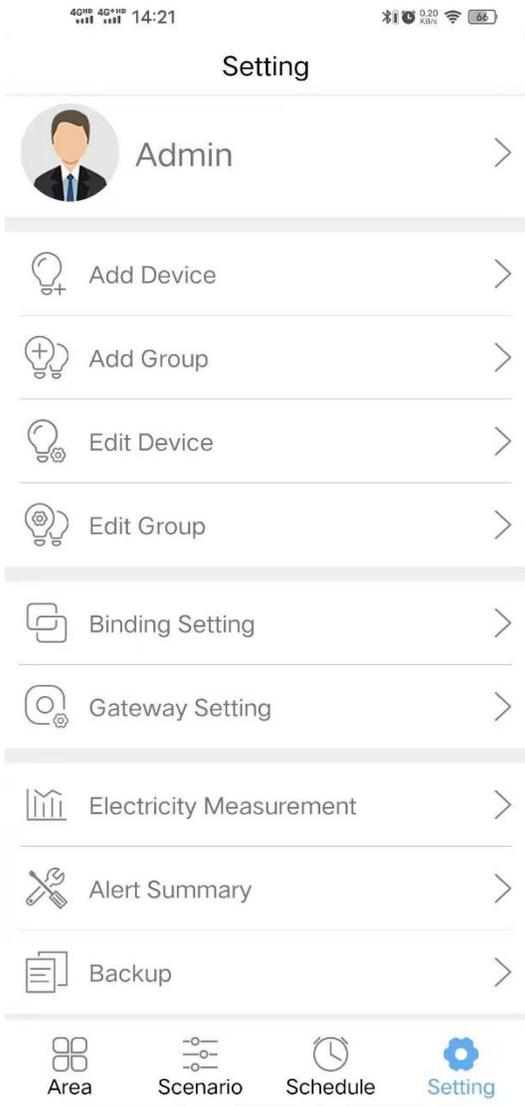



- ◆ Click "Setting" from menu bar on the bottom, click "Add Device".
- ◆ Select the gateway to search for the device, click "Search Device".
- ◆ When searching for devices, the gateway indicator flashes alternately.
- ◆ After searching for the device, "Add device" will be displayed the number.
- ◆ When the devices are all searched, click "stop searching".

Edit Device

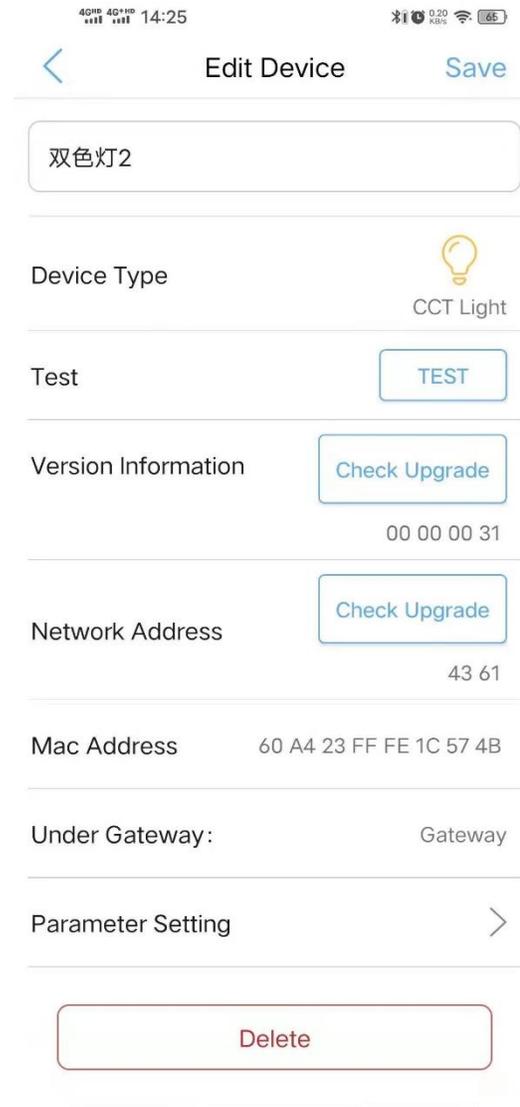


- ◆ Click the searched device in “Device List” to edit the device.
- ◆ Click “test” button, the corresponding lamp will flash twice.

Add Group

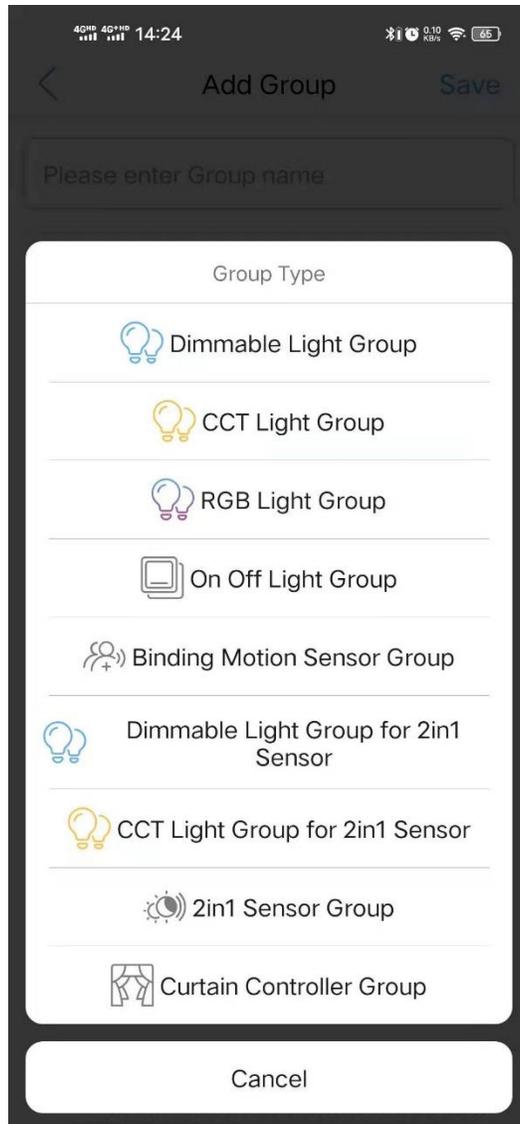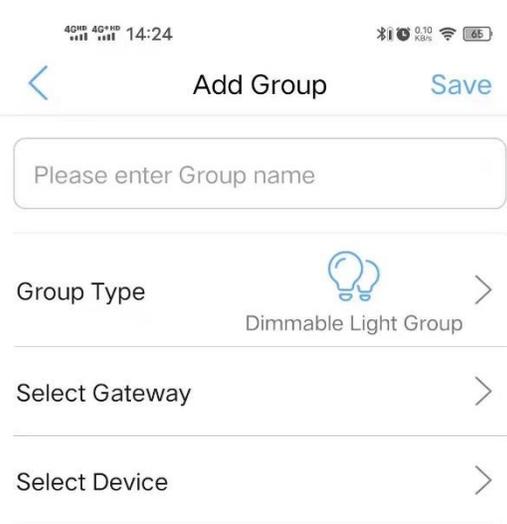


- ◆ Add Group is to arrange devices of same type into a group, so as to control them simultaneously, as a single entity.
- ◆ Click "Add Group" and enter Group name, select "Group Type" and "Gateway".
- ◆ Select the device to be added to the group, click "Save". Phone will be redirected to the "Add Group" interface, and then click "Save".

Add Area

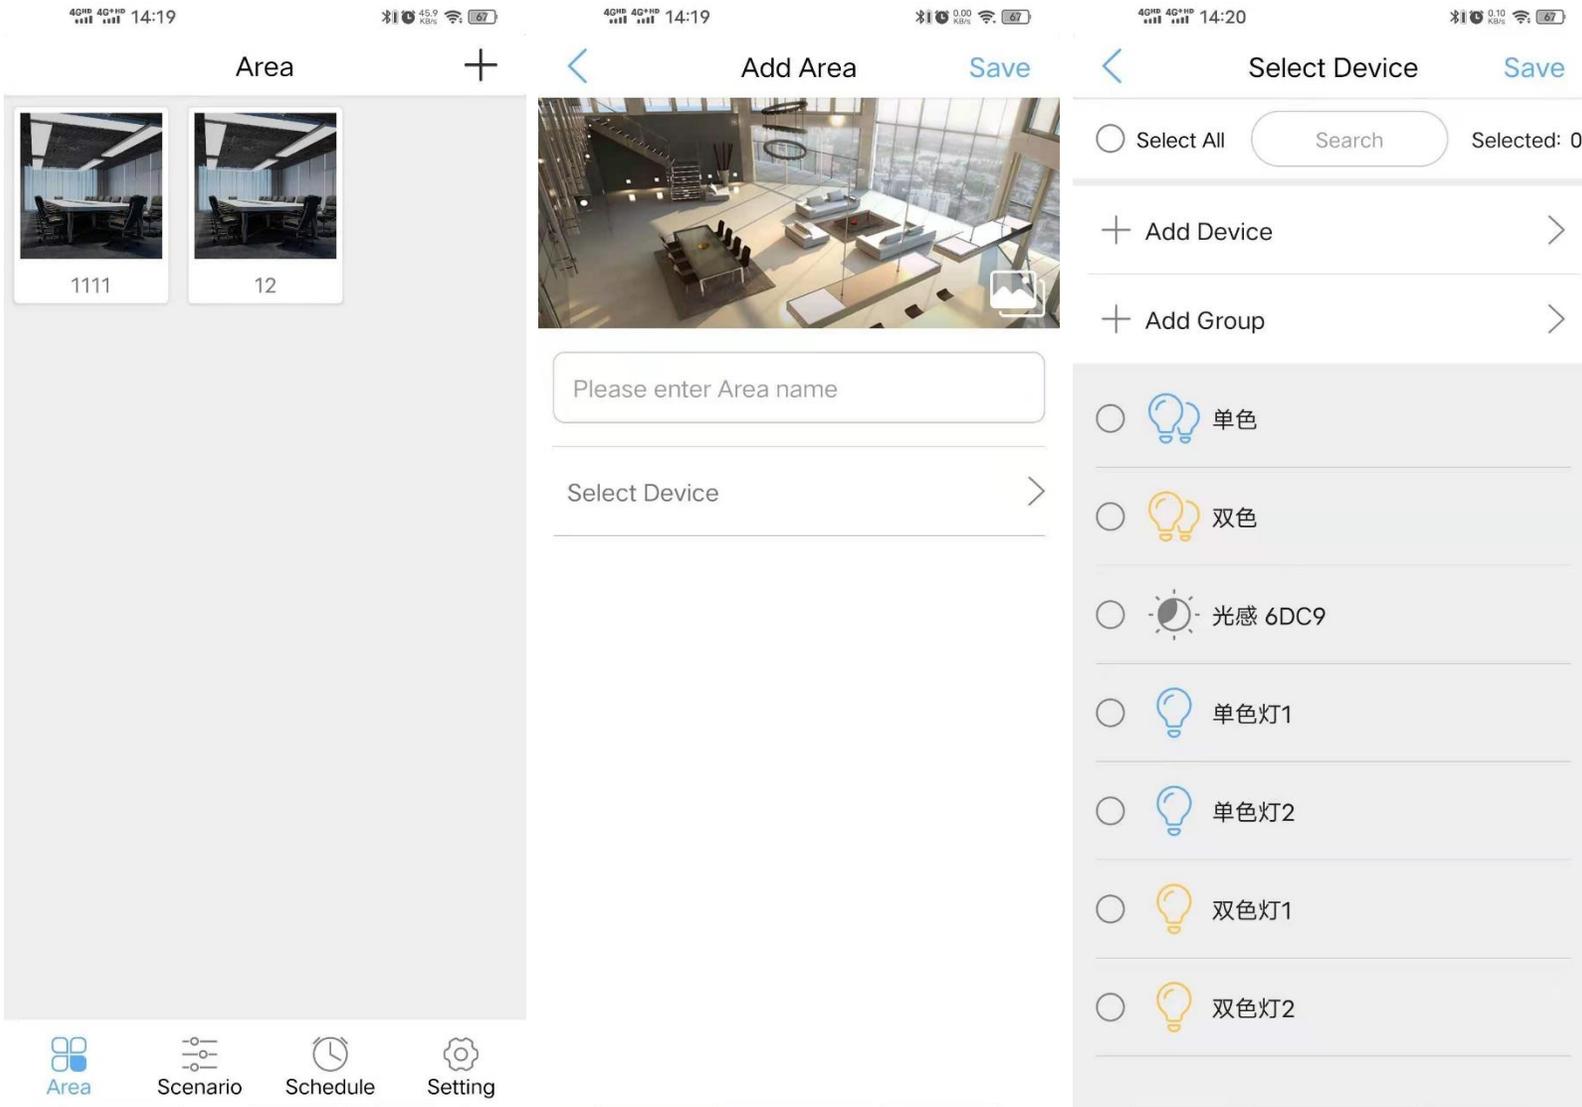

- ◆ Click "Area" from menu bar on the bottom, click the "+" in the upper right corner of the area interface to add an area.
- ◆ Enter area name, click "Select Device" to select the device to be added into the area, click "Save". Phone will be redirected to the "Add Area" interface, and then click "Save".

Area Control


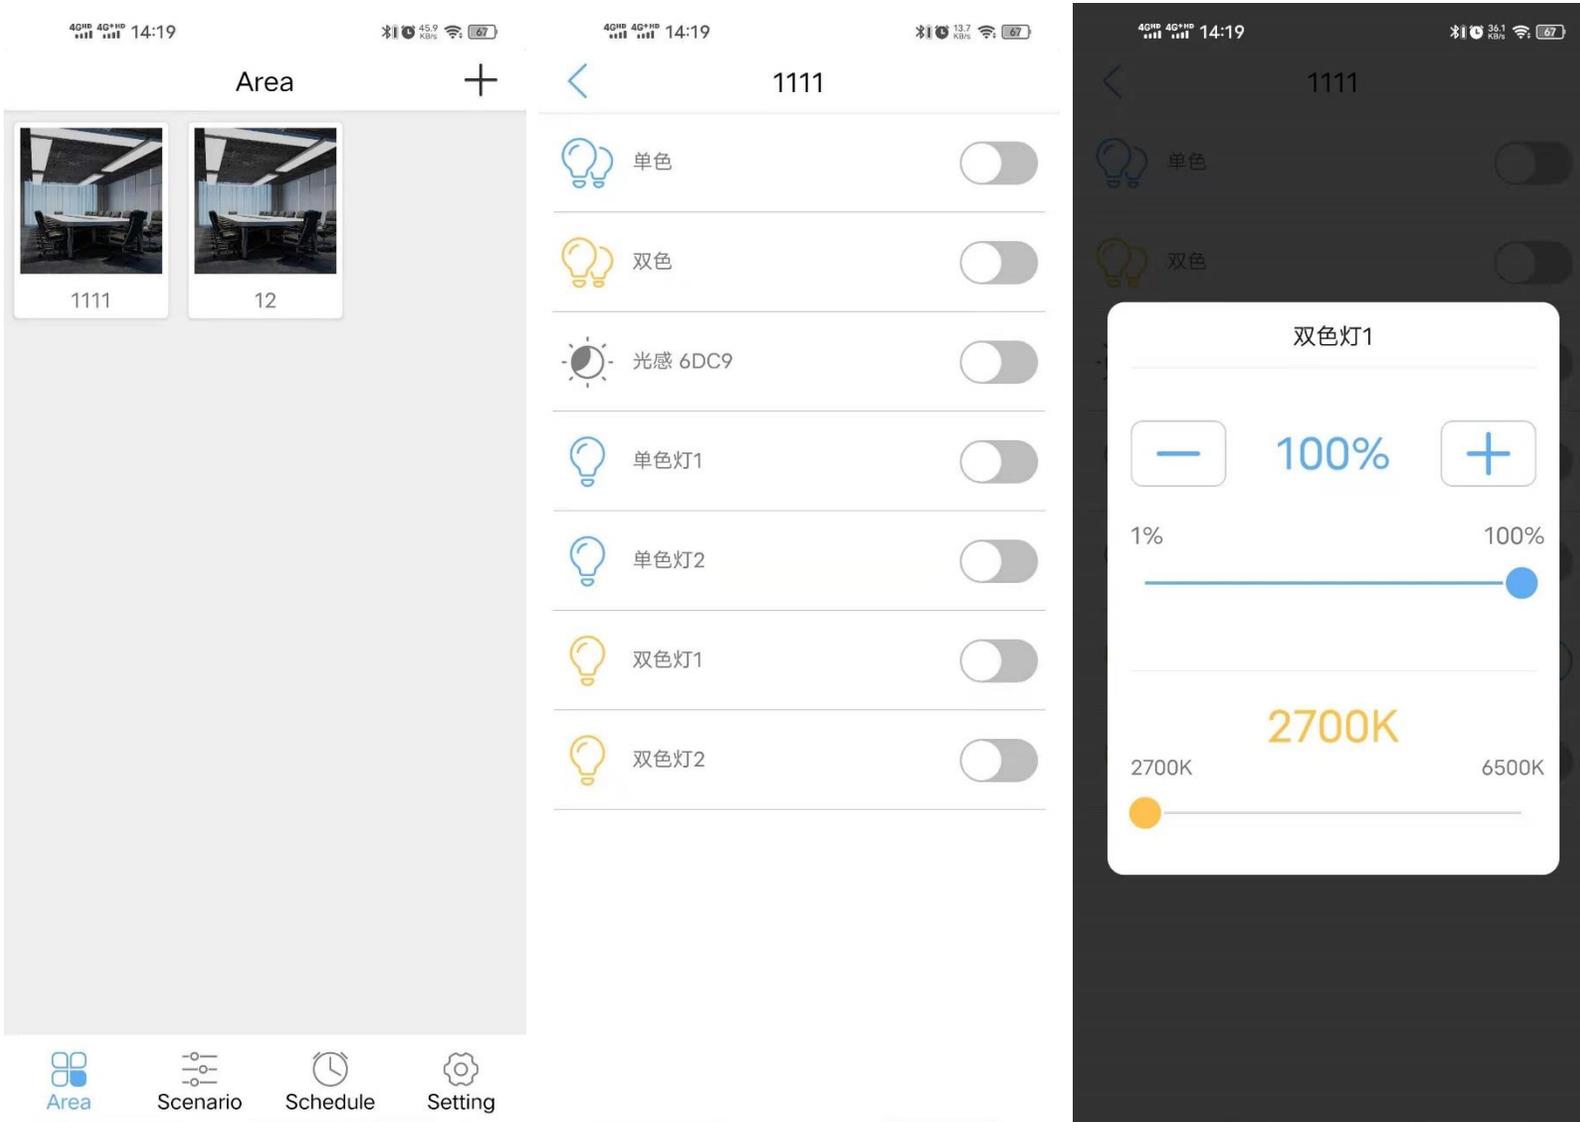


◆ Click an created area.

◆ Click the device to call up the dimming interface of the lamp.



◆ Click "  " to on/off the device.

Set sensor parameters in area

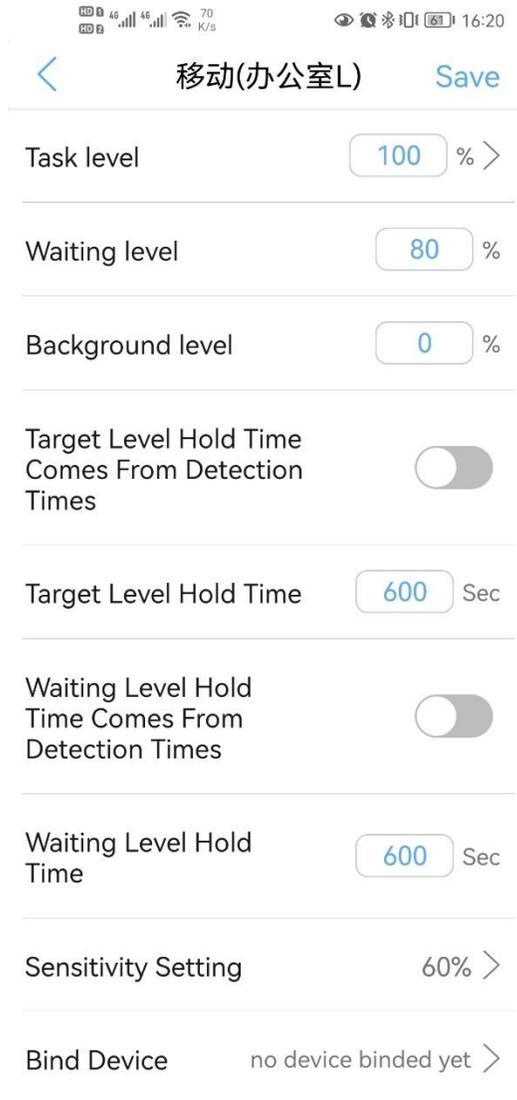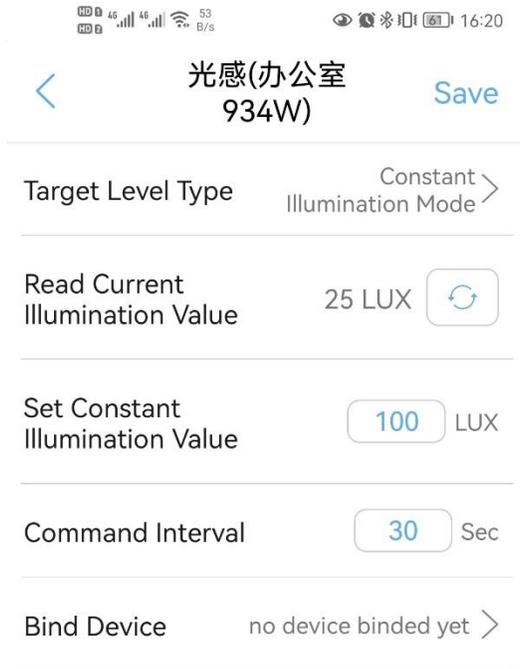

- ◆ Click the sensor in the area to call up the sensor parameter setting interface.
- ◆ Set the required parameters according to needs.
- ◆ Binding the lights to be controlled by the sensor is optional.

Add Scenario

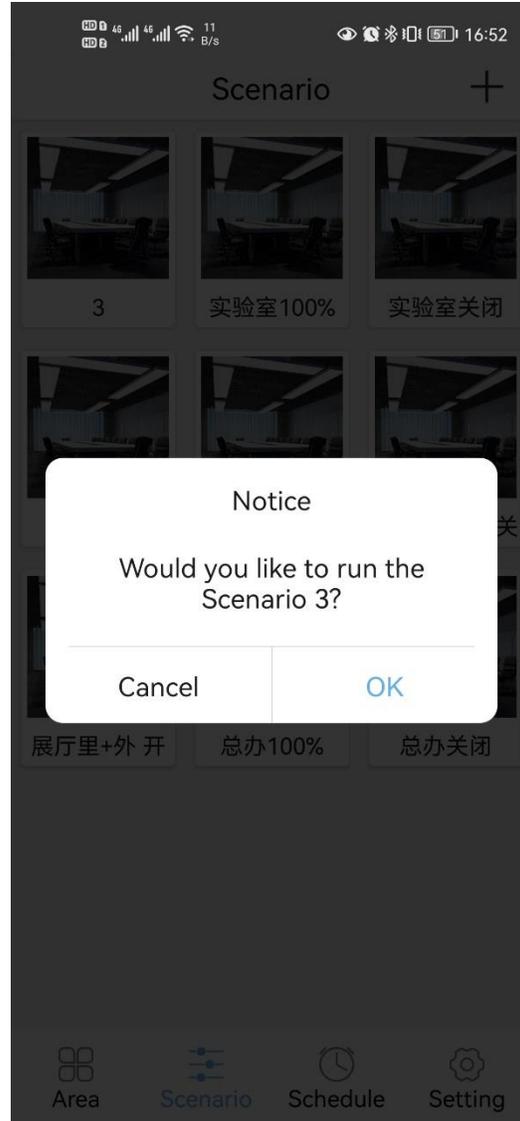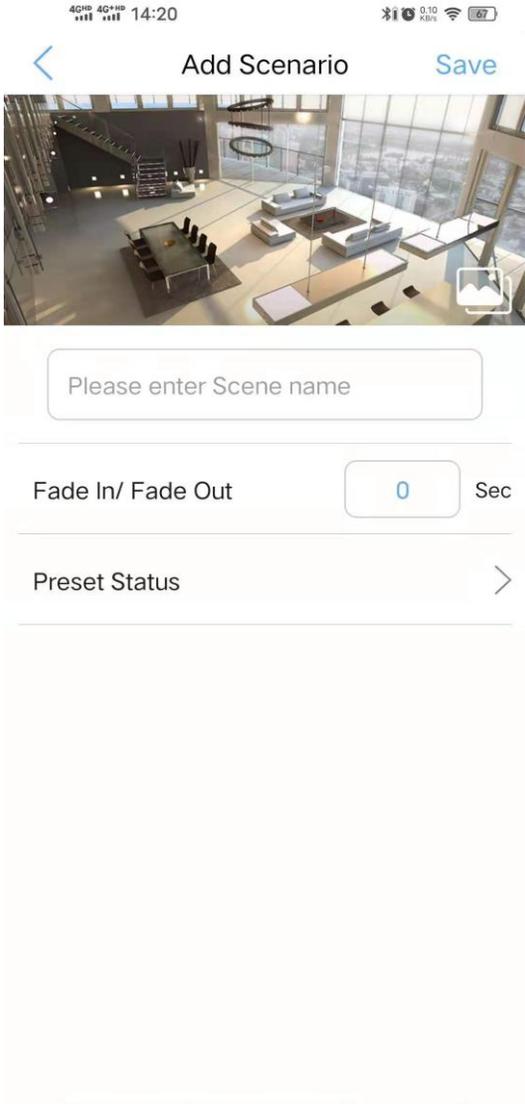

- ◆ Click "Scenario" from menu bar on the bottom, click the "+" in the upper right corner of the scenario interface to add an scenario.
- ◆ Enter scene name, click "Preset Status" to set device status, click "Save".
- ◆ Click the created scenario to execute it. The device will be adjusted to the set status.

Add Schedule

4G+ 4G+ 14:20 0.40 KB/s 67

< Add Schedule Save

Please enter Schedule name

Start Time 06:30 >

Starting Status >

End Time 18:30 >

End Status >

Fade In/ Fade Out

Repeat Interval Repeat Weekly >

Run Date >

4G+ 4G+ 14:20 0.10 KB/s 67

Schedule +

1




Start: 06:30 End: 18:30

Mon Tue

Area Scenario Schedule Setting




- ◆ Click "Schedule" from menu bar on the bottom, click the "+" in the upper right corner of the schedule interface to add an schedule.
- ◆ Enter schedule name, click "Start Time" and "End Time", click "Starting Status" and "End Status" to set the device status. Fade In/ Fade Out is optional. Select "Repeat Interval" and "Run Date". Click "Save", Schedule setting is done.
- ◆ When the time is up, the system will automatically execute the preset state.

Account Management

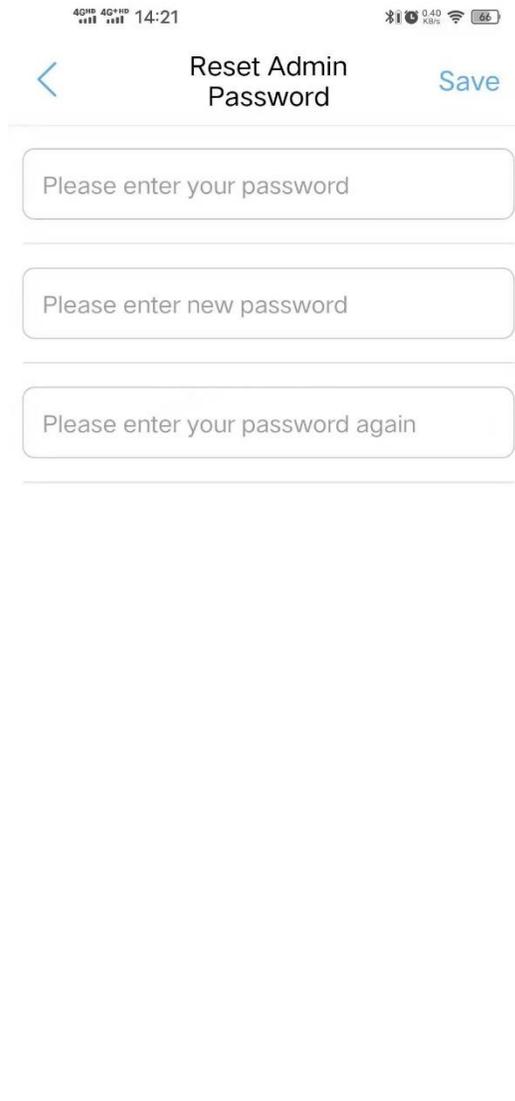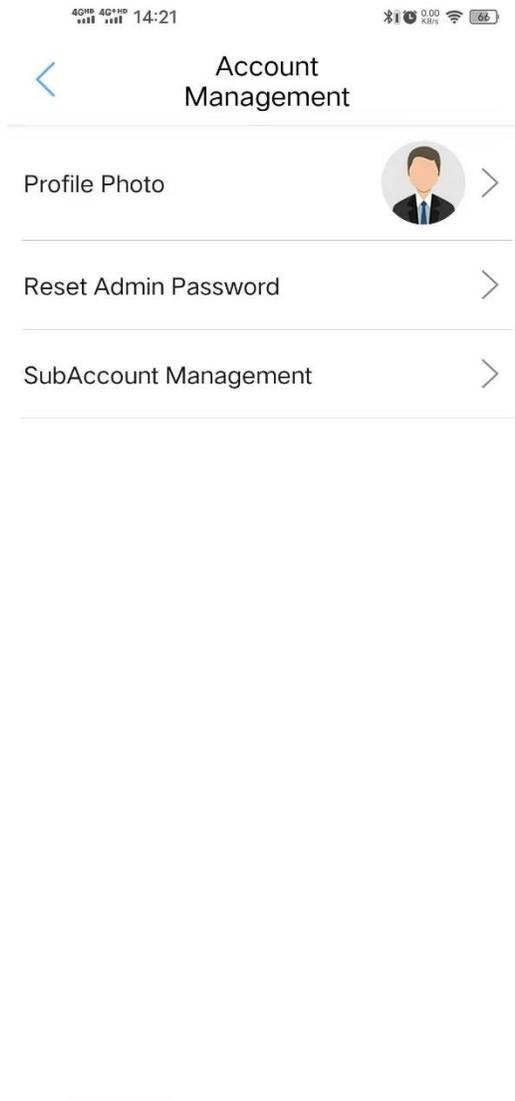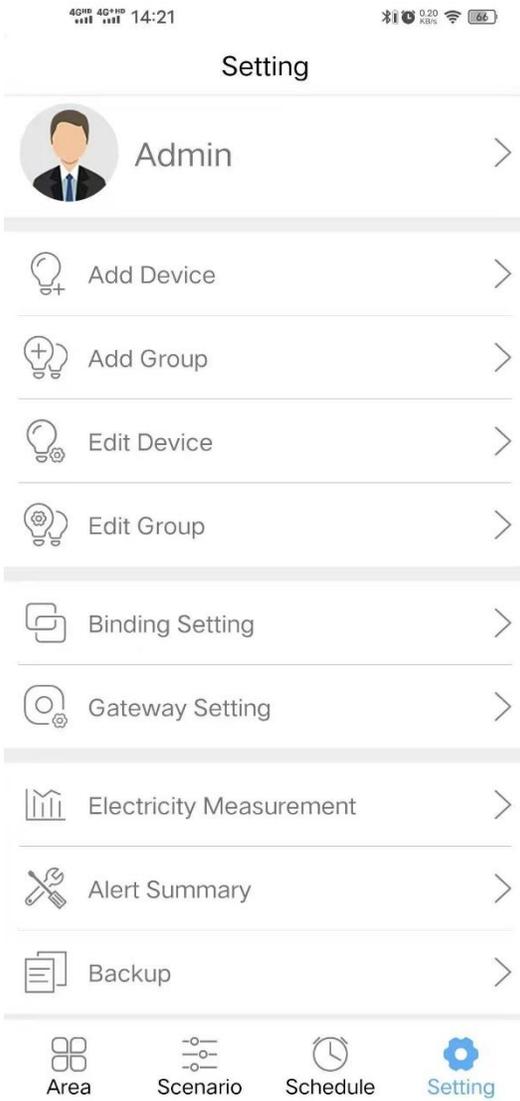

- ◆ Click "Setting" from menu bar on the bottom, click the "Admin" to enter the account editing interface.
- ◆ Admin account is authorized to reset Admin password.
- ◆ Admin account is authorized to create sub account.

Subaccount Management

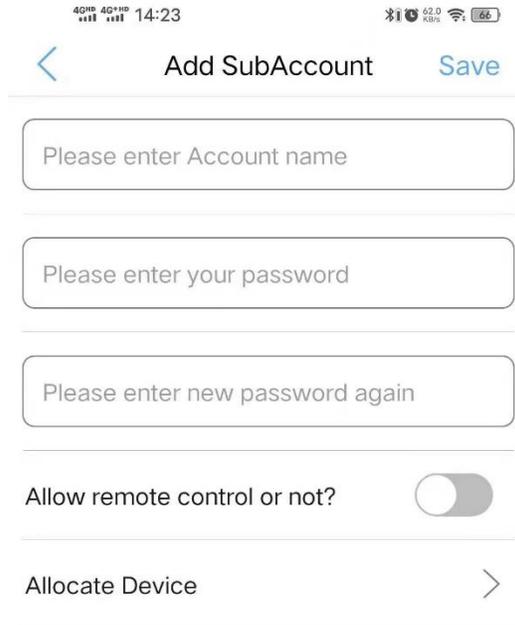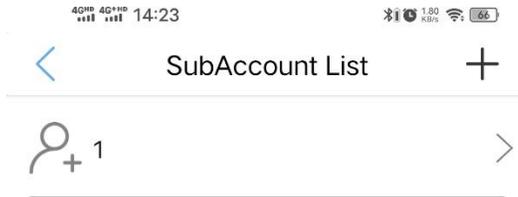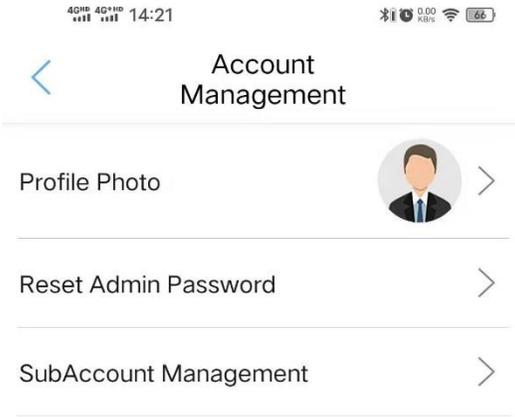

- ◆ Click "Setting" from menu bar on the bottom, click the "Admin" to enter the account editing interface.
- ◆ Click "SubAccount Management", click the "+" in the upper right corner of the subaccount list interface to create an sub account.
- ◆ Enter sub account name and password, decide if "Allow remote control or not", click "Allocate Device for the sub account" to allocate device.

Binding Setting

The image displays three sequential screenshots of a mobile application interface for setting up device bindings.

Screenshot 1: Binding Setting
This screen shows a list of device categories, each with an icon and a right-pointing arrow:

- 办公室934(测试)
- 4294AC
- A74A14
- 六键(实验室)
- 六键(总办)
- 六键(研发中心)
- 六键(会议室)
- 展厅933面板(里)
- 展厅B14面板(里)
- 展厅HRC811遥控器
- 财务遥控
- 触控板(前台)

Screenshot 2: Select Device
This screen allows for selecting a device from a list. It features a search bar and a 'Selected: 2' indicator. The list of devices includes:



- 办公室934(测试)
- 6
- Q2
- 前台
- 前台测1
- 前台测2
- 前台测3
- W
- 会议室
- 办公室
- 实验室

Screenshot 3: Binding Setting
This screen shows a list of scenarios and a 'Device' option, each with a right-pointing arrow:

- Scenario 1: no device binded yet
- Scenario 2: no device binded yet
- Scenario 3: no device binded yet
- Scenario 4: no device binded yet
- Scenario 5: no device binded yet
- Scenario 6: no device binded yet
- Device: no device binded yet

- ◆ Click "Setting" from menu bar on the bottom, click the "Binding Setting" to enter the sensor or wall switch binding interface.
- ◆ Click the sensor or wall switch you want to bind, select the device or group you want to bind, and click "Save".
- ◆ The scenarios bound with the wall switch need to be created before they can be bound.

Data Backup

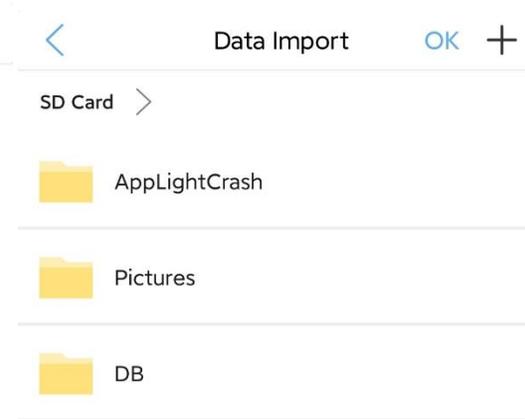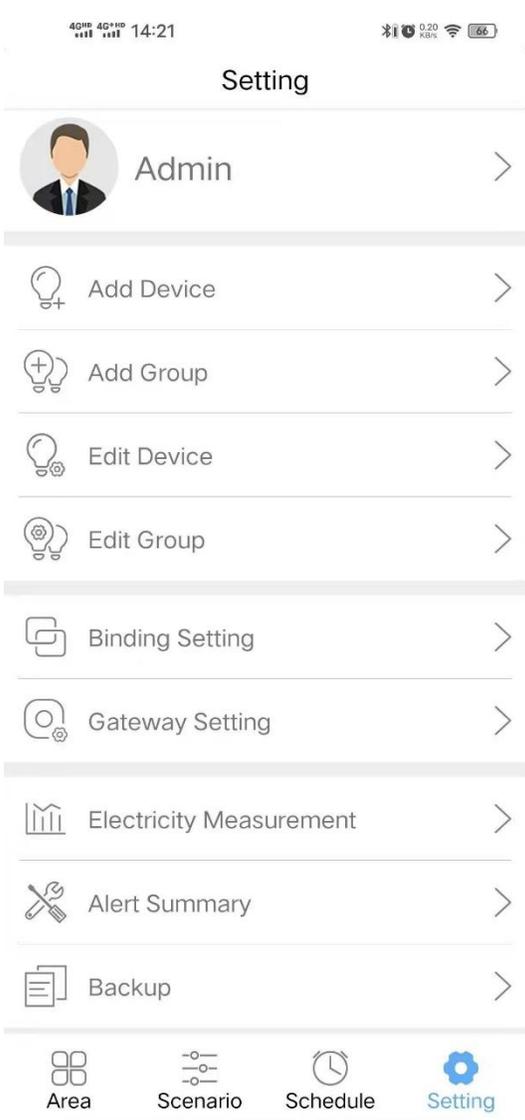

- ◆ Click "Setting" from menu bar on the bottom, click the "Backup" to enter the data backup interface.
- ◆ Select "export data" or "import data", select the folder, and click "save".

Using light creatively to drive sales

Parify Lighting Ltd

Unit 14

The Courtyard

Whitwick Business Park

Stenson Rd

Leicester

LE67 4JP

UK

t: +44 (0)1509 323 111

e: sales@parify.co.uk

w: parifylighting.co.uk



PARIFY
LIGHTING