



PARIFY
LIGHTING

IN-CABINET LIGHTING

FOR RETAIL & EXHIBITION PRESENTATION

CREATIVE ILLUMINATION ENGINEERED TO INCREASE SALES & CAPTURE WONDER IN EVERY SPACE

WWW.PARIFYLIGHTING.CO.UK



PARIFY
LIGHTING

CONTENTS

Adjustable Shelf Illumination	03
Mini Spot Light Series	04-06
Mini Recessed Light Series	07-10
Stalk Light Series	11-18
Bridge Light Series	19-20
Linear Spot Light Bar Series	21-22
Mini Track Light Series	23-26
Micro-Line Dimmable Track Light	27
Micro-Line Track	28-29
Linear Light Series	30-31

ADJUSTABLE SHELF ILLUMINATION SYSTEM (ASIS)



Model: ASIS

Size: Custom Length x 18.5W x 6.5H (mm)

Length: 200-2000mm in Height

Voltage: 12-48V DC

CCT: 3000-6000K

Lumen: Bespoke

CRI: Bespoke

Beam angle: Bespoke

Track Mounting Options: Flat 'U', Quadrant, Special Req.

Lens Type: Clear/Opaque

Profile Method: VHB Tape


Profile Finish: Satin Aluminium (Standard), Special Req.

Body Colours: Black/White


Material: PVC



MINI SPOT LIGHT SERIES




Model: PAR101S
 Wattage: 1W
 Dimension: $\Phi 18.6 \times 22$ mm
 Head rotary: 360°
 Voltage: DC 12V/AC 110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm
 CRI: Ra90
 Beam angle: 15/40°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold





Model: PAR511
 Wattage: 1W
 Dimension: $\Phi 16 \times 26$ mm
 Voltage: AC 110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 85lm
 CRI: Ra80/90
 Beam angle: 15/25/45°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold

Zoomable




Model: PAR102-1
 Wattage: 2W
 Head rotary: 360°
 Voltage: DC 12V/AC 110-240V
 Current: 500mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 200lm
 CRI: Ra90
 Beam angle: 6-60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix


MINI SPOT LIGHT SERIES

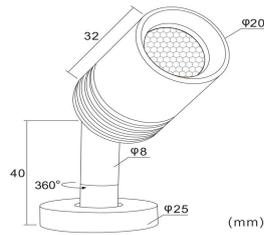

Model:Surface Mount PAR101-1
 Wattage:2W
 Head rotary:360°
 Voltage:DC12V/AC110-240V
 Current:500mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120-180lm
 CRI:Ra80/93
 Beam angle:10/30/60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Installation:Screw fix or surface mounted

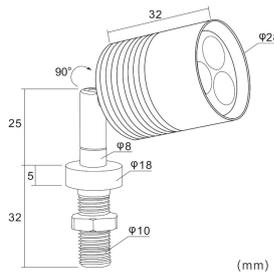


Model:Surface Mount PAR103-1
 Wattage:3W
 Head rotary:360°
 Voltage:DC12V/AC110-240V
 Current:250mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:300-390lm
 CRI:Ra80/93
 Beam angle:15/30/60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Installation:Screw fix or surface mounted




Model:Surface Mount PAR103S
 Wattage:3W
 Dimension:Φ32*40mm
 Cut size:Φ10mm
 Voltage:AC110-240V
 Current:350mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:300lm
 CRI:Ra80
 Beam angle:15/25/45°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black
 Installation:Screw fix or surface mounted

MINI SPOT LIGHT SERIES




Model: Surface Mount PAR111-1
 Wattage: 1W
 Height: Custom made
 Voltage: DC12V/24V/AC110-240V
 Current: 300mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 80lm
 CRI: Ra80/93
 Beam angle: 25°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Cut Size: Φ10mm

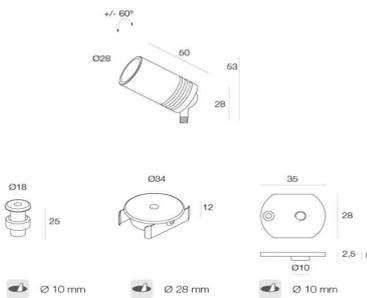

Model: Surface Mount PAR103A/B/C
 Wattage: 3W
 Head rotary: 360°
 Voltage: DC12V/AC110-240V
 Current: 250mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 295lm
 CRI: Ra90
 Beam angle: 15/25/45°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black
 Installation: Recessed or surface mounted


Zoomable




Model: Surface Mount PAR115-1
 Wattage: 3W
 Dimension: Φ24*38mm
 Cut size: Φ10mm
 Voltage: DC12V/24V/AC110-240V
 Current: 600mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 180lm
 CRI: Ra90
 Beam angle: 10-60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black
 Installation: Screw fix or surface mounted

MINI RECESSED LIGHT SERIES

Zoomable

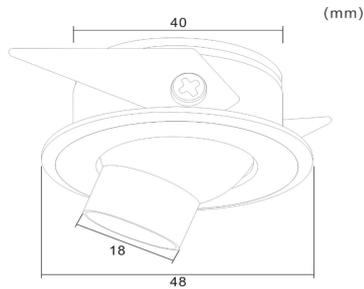


Model: Recessed PAR108
 Wattage: 3W
 Dimension: $\Phi 45 \times 40$ mm
 Cut size: $\Phi 40$ mm
 Voltage: AC110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 200lm
 CRI: Ra80/93
 Beam angle: 15-60° zoomable
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised black/silver
 Installation: Recessed




Model: Recessed PAR108-1
 Wattage: 3W
 Dimension: $\Phi 48 \times 32$ mm
 Cut size: $\Phi 40$ mm
 Voltage: AC110-240V
 Current: 600mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 150-200lm
 CRI: Ra80/93
 Beam angle: 15/25/45/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Recessed

Zoomable




Model: Recessed PAR108-12
 Wattage: 5W
 Dimension: $\Phi 74 \times 70$ mm
 Cut size: $\Phi 64$ mm
 Voltage: AC110-240V
 Current: 700mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 300-380lm
 CRI: Ra80
 Beam angle: 10-60° zoomable
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black
 Installation: Recessed

MINI RECESSED LIGHT SERIES




Model: Recessed PAR108-3
Wattage: 2W
Dimension: $\Phi 42 \times 25$ mm
Cut size: $\Phi 36$ mm
Voltage: AC110-240V
Current: 350mA
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 200lm
CRI: Ra80/93
Beam angle: 45°
IP: IP20
Material: Aluminum
Shell colour: White/black
Installation: Recessed



Model: Recessed PAR108-4
Wattage: 1W
Dimension: $\Phi 22 \times 24$ mm
Cut size: $\Phi 18$ mm
Voltage: AC110-240V
Current: 350mA
LED Source: Cree LED
CCT: 2700-6000k
Lumen: 150lm
CRI: Ra90
Beam angle: 45°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black
Installation: Recessed


MINI RECESSED LIGHT SERIES

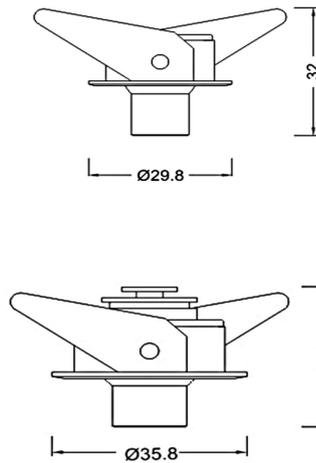

Model: Recessed PAR108-9
 Wattage: 1w
 Dimension: $\Phi 29.8 \times 32 / \Phi 35.8 \times 32$ mm
 Cut size: $\Phi 25 / \Phi 33$ mm
 Voltage: AC110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 75-90lm
 CRI: Ra80/93
 Beam angle: 30°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Recessed




Model: Recessed PAR108-10
 Wattage: 3W
 Dimension: $\Phi 48 \times 55$ mm
 Cut size: $\Phi 40$ mm
 Voltage: AC110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 80-100lm
 CRI: Ra80/93
 Beam angle: 5/15/25/45°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Recessed

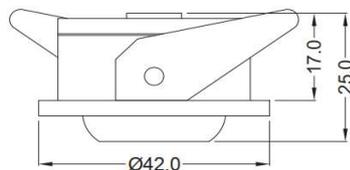


Model: Recessed 108-11
 Wattage: 1W
 Dimension: $\Phi 38.8 \times 23.1$ mm
 Cut size: $\Phi 38$ mm
 Voltage: AC110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 70-90lm
 CRI: Ra80/93
 Beam angle: 15/25/45°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Recessed


MINI RECESSED LIGHT SERIES




Model: Recessed PAR108-6
 Wattage: 3w
 Dimension: Φ52*33mm
 Cut size: Φ45mm
 Voltage: AC110-240V
 Current: 600mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 150-200lm
 CRI: Ra80/93
 Beam angle: 15/25/45°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/white
 Installation: Recessed




Model: Recessed PAR108-7
 Wattage: 3W
 Dimension: Φ52*33mm
 Cut size: Φ45mm
 Voltage: AC110-240V
 Current: 250mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 300-390lm
 CRI: Ra80/93
 Beam angle: 15 30 60
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black
 Installation: Recessed




Model: Recessed PAR108-13
 Wattage: 1W
 Dimension: Φ45*35mm
 Cut size: Φ40mm
 Voltage: AC110-240V
 Current: 350mA
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 90-120lm
 CRI: Ra80/93
 Beam angle: 15/25/45°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black
 Installation: Recessed

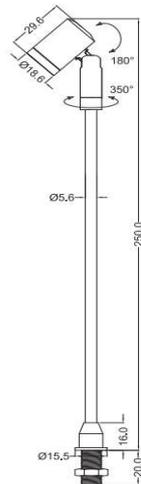

Model:Stalk PAR102
 Wattage:1W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120-180lm
 CRI:Ra80/93
 Beam angle:15/40°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/chrome
 Cut hole:Φ10mm

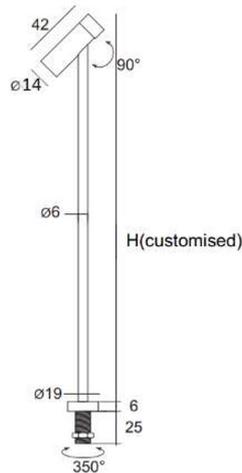


Model:Stalk PAR101A
 Wattage:1W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:110-120lm
 CRI:Ra80/93
 Beam angle:30°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ10mm

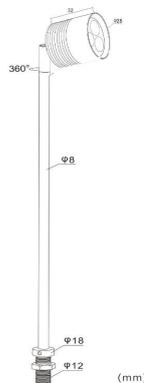


Model:W103D
 Wattage:3W
 Height:custom made
 Voltage:AC110-240V
 Current:250mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:300-390lm
 CRI:Ra80/93
 Beam angle:15/30/60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ12mm

Zoomable




Model:Stalk PAR111
 Wattage:1W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:90lm
 CRI:Ra80/93
 Beam angle:10-60°zoomable
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black
 Cut hole:Φ11mm

Zoomable

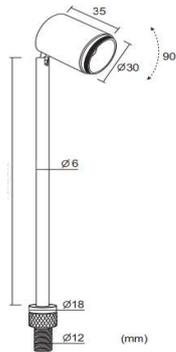


Model:Stalk PAR113
 Height:Custom made
 Voltage:AC110-240V
 Current:600mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:180lm
 CRI:Ra80/93
 Beam angle:10-60°zoomable
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black
 Cut hole:Φ13mm


Zoomable

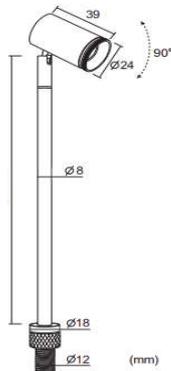


Model:Stalk PAR115
 Wattage:3W
 Height:custom made
 Voltage:AC110-240V
 Current:600mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:175lm
 CRI:Ra80/93
 Beam angle:10-60°zoomable
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ13mm

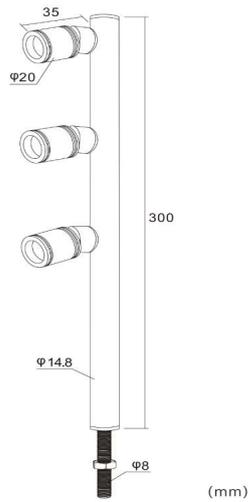


Model:Stalk PAR112B
 Wattage:2-10W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120lm/Head
 CRI:Ra80/93
 Beam angle:25/45°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ8mm

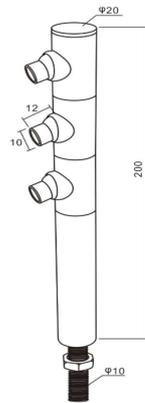


Model:Stalk PAR112A
 Wattage:2-10W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-8000k
 Lumen:120lm/Head
 CRI:Ra80/93
 Beam angle:25/45/60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ10mm

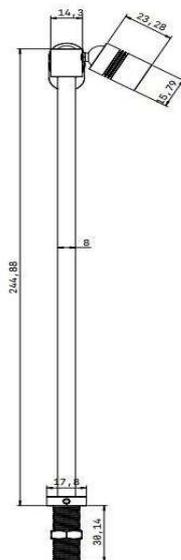


Model:Stalk PAR101B
 Wattage:2W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120lm/Head
 CRI:Ra80/93
 Beam angle:25/45°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ10mm

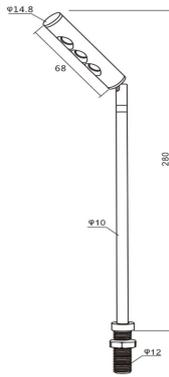

Model:Stalk PAR120A
 Wattage:3W
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:330-390lm
 CRI:Ra80/93
 Beam angle:25/45°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ12mm




Model:Stalk PAR120B
 Wattage:6*0.5W 3W
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:200-300lm
 CRI:Ra80/93
 Beam angle: 60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ12mm




Model:Stalk PAR120C
 Wattage:3W
 Dimension:Φ6*250-400mm or custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:200lm
 CRI:Ra83
 Beam angle:120°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black
 Cut size:Φ10mm


STALK LIGHT SERIES

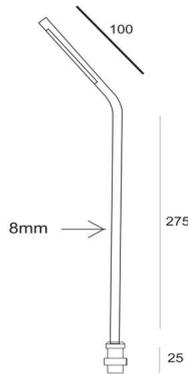

Model:Stalk PAR120F
 Wattage:3W
 Height:300mm or custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram SMD
 CCT:2700-6000k
 Lumen:220-280lm
 CRI:Ra80/93
 Beam angle:60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised Black
 Cut size:Φ10mm

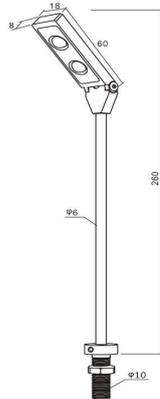

Model:Stalk PAR122A
 Wattage:2W/3W
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:200-300lm
 CRI:Ra80/93
 Beam angle:25/45°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ10mm

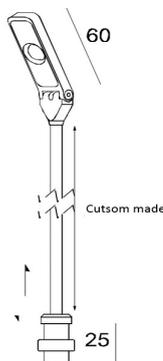

Model:Stalk PAR122C
 Wattage:3W
 Height:Custom made
 Voltage:AC110-240V
 Current:650mA
 LED Source:Cree COB LED
 CCT:2700-6000k
 Lumen:300lm
 CRI:Ra80/90
 Beam angle: 60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ10mm

STALK LIGHT SERIES




Dia14.3mm



Custom made height


Model:Stalk PAR016D
 Wattage:3W
 Dimension:Φ14.3*300mm or custom made
 Voltage:DC12V
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:330-390lm
 CRI:Ra80/93
 Beam angle:60°
 IP:IP20
 Material:Aluminum
 Shell colour:Silver/Black/Gold
 Cut size:Φ10mm

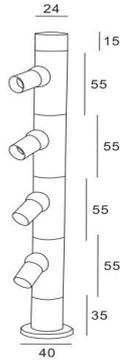


Model:Stalk PAR901
 Wattage:2W/Head
 Dimension:Φ24mm
 Voltage:AC110-240V
 Current:500mA
 LED Source:Osram LED
 CCT:3000K/4000K/5000K
 Lumen:120lm/Head
 CRI:Ra90
 Beam angle:45°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black
 Cut size:Φ10mm




Model:Stalk PAR120D
 Wattage:3W
 Dimension:Φ10mm*300mm or custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram SMD
 CCT:2700-6000k
 Lumen:220-280lm
 CRI:Ra80/93
 Beam angle:45°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ12mm




Model:Stalk PAR112G
 Wattage:2-10W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120lm/Head
 CRI:Ra80/93
 Beam angle:25//45°
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ10mm

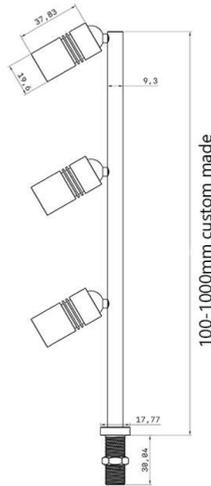


Model:Stalk PAR112H
 Wattage:2-10W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120lm/Head
 CRI:Ra80/93
 Beam angle:25/45°
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ10mm



Model:Stalk PAR112M
 Wattage:2-0W
 Height:Custom made
 Voltage:AC110-240V
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120lm/Head
 CRI:Ra80/93
 Beam angle:25//45°
 Material:Aluminum
 Shell color:Anodised silver/black/gold
 Cut size:Φ10mm




Model:Stalk PAR122E
 Wattage:4W
 Voltage:AC110-240V
 Current:300mA
 Height:Custom made
 LED Source:Cree COB
 CCT:2700-5000k
 Lumen:400lm
 CRI:Ra80/93
 Beam angle:60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black Cut
 size:Φ10mm

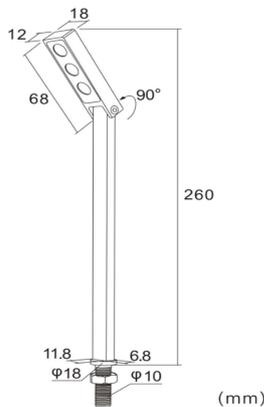


Model:Stalk PAR122B
 Wattage: 3W/5W
 Voltage:AC110-240V
 Current:300mA
 Height:Custom made
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120lm/W
 CRI:Ra80/93
 Beam angle:25/45/60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ10mm


Zoomable





Model:Stalk PAR102
 Wattage:3W Zoomable
 Voltage:AC110-240V
 Height:Custom made
 Current:300mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120-180lm
 CRI:Ra80/93
 Beam angle:8-60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold
 Cut size:Φ12mm




Model: Bridge 016
 Wattage: 16W/Meter
 Voltage: DC12V/DC24V
 PC cover: Milky/clear
 Length: Custom made
 Height: Custom made
 LED Source: Osram SMD
 CCT: 2700-8000k
 Lumen: 100lm/Wattage
 CRI: Ra80/93
 Beam angle: 90°
 IP: IP20
 Rotary: 360°
 Material: Aluminum/PC
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted

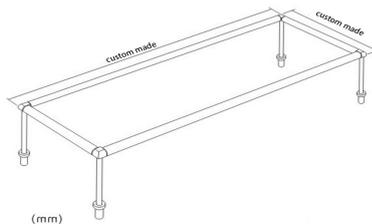


Model: Round Corner Bridge 016A
 Wattage: 16W/Meter
 Voltage: DC12V/DC24V
 PC cover: Milky/clear
 Length: Custom made
 Height: Custom made
 LED Source: Osram SMD
 CCT: 2700-8000k
 Lumen: 100lm/Wattage
 CRI: Ra80/93
 Beam angle: 90°
 IP: IP20
 Rotary: 360°
 Material: Aluminum/PC
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix

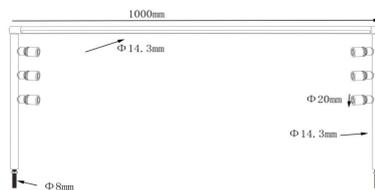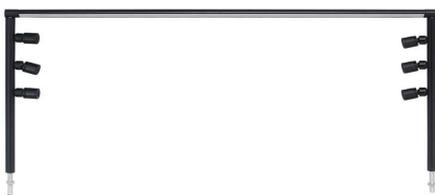


Model: Bridge 016B
 Wattage: 24W/Meter
 Voltage: DC12V/AC110-240V
 PC cover: Milky/clear
 Length: Custom made
 Height: Custom made
 LED Source: Osram SMD
 CCT: 2700-8000k
 Lumen: 100lm/Wattage
 CRI: Ra80/93
 Beam angle: 90°
 IP: IP20
 Rotary: 360°
 Material: Aluminum/PC
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted




Model: Bridge 019
 Wattage: 16W/Meter
 Profile size: Ø12mm
 Voltage: DC12V
 Height: Custom Made
 LED Source: 210PCS SMD
 CCT: 3000-6000k
 Lumen: 100lm/Watt
 CRI: Ra80/93
 Beam angle: 60°
 IP: IP20
 Material: Aluminum
 Rotary: 350°
 Shell colour: Anodised silver/black/gold

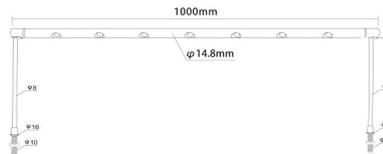


Model: Bridge 522
 Wattage: 14W/Meter
 Profile size: Ø14.8mm
 Voltage: DC24V/AC110-240V Length: Max 1200mm
 Height: Custom Made
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 1400-1680lm
 CRI: Ra80/93
 Beam angle: 25/45/60°
 IP: IP20
 Material: Aluminum
 Rotary: 360°
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted

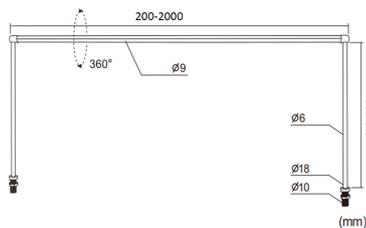


Model: Bridge 523 Slimline
 Available in 3 Types PC, Barn Door & Spot)
 Wattage: 14W/Meter or 16W/Meter
 Profile size: Ø9mm
 PC: Clear or milky diffuser
 Voltage: DC12V/AC110-240V
 Length and height: Custom made
 LED Source: Osram SMD
 CCT: 2700-6000k
 Lumen: 100lm/W
 CRI: Ra80/93
 Beam angle: 45°
 IP: IP20
 Material: Aluminum
 Rotary: 360°
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted

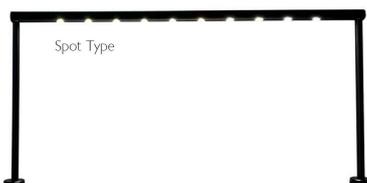


LINEAR SPOT LIGHT BAR SERIES

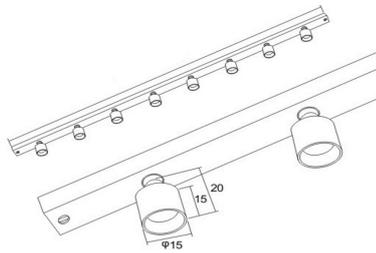

Model: Linear Spot 533-U
 Wattage: 2W-20W
 Aluminum profile: 11*11mm
 Voltage: DC24V/AC110-240V
 Length: 150-2000mm
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/Head
 CRI: Ra80/93
 Beam angle: 25/45/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted

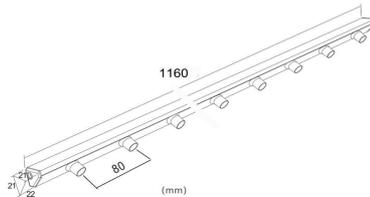

Model: Linear Spot 533-V
 Wattage: 2W-20W
 Voltage: DC24V/AC110-240V
 Length: 150-2000mm
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/Head
 CRI: Ra80/93
 Beam angle: 25/45/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted

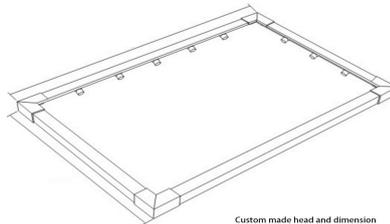


Model: Linear Spot 530
 Wattage: 2W-20W
 Voltage: DC24V/AC110-240V
 Dimension: custom made
 LED Source: Osram LED
 CCT: 2700-6000k
 Lumen: 100lm/Head
 CRI: Ra80/93
 Beam angle: 25/45/60°
 IP: IP20
 Material: Aluminum
 Shell colour: Anodised silver/black/gold
 Installation: Screw fix/surface mounted


LINEAR SPOT LIGHT BAR SERIES



Model: Linear Spot 150
DC-end Spot light
Head Dimension: Dia15*43mm Aluminum
Profile Dimension: 26*25mm Aluminum
Length: Custom made
Voltage: DC5V
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 80lm/Head
CRI: Ra80/93
Beam angle: 30°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black/gold
Installation: Screw fix/surface mounted

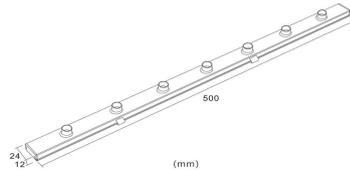

Model: Linear Spot 532-U
Wattage: 2W-20W
Aluminum profile: 24*12mm
Voltage: DC24V/AC110-240V
Length: 150-2000mm
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 100lm/Head
CRI: Ra80/93
Beam angle: 25/45/60°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black/gold
Installation: Screw fix/surface mounted



Model: Linear Spot 532-V
Wattage: 8W
Voltage: DC24V/AC110-240V
Dimension: 500mm
LED Source: Osram LED
CCT: 2700-6000k
Lumen: 100lm/Head
CRI: Ra80/93
Beam angle: 25/45/60°
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black/gold
Installation: Screw fix/surface mounted

MINI TRACK LIGHT SERIES




Model: Mini-Track U-Trak
Size: 14*11mm
Length: 300-2000mm
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black




Model: Mini-Track V-Trak
Size: 15.5*15.5mm
Length: 300-2000mm
IP: IP20
Material: Aluminum
Shell colour: Anodised silver/black

MINI TRACK LIGHT SERIES

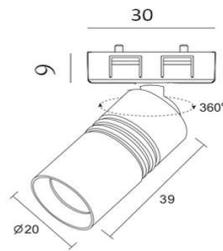


Model: Mini-Trak 101-2
 Wattage:2W
 Head rotary:355°
 Voltage:DC12V/DC24V Non-dimmable
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120-180lm
 CRI:Ra80/93
 Beam angle:15/30/60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black

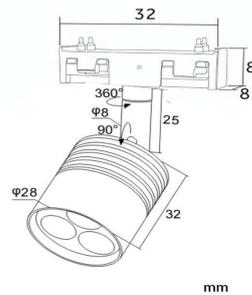


Model: Mini Trak 103-2
 Wattage:3W
 Head rotary:355°
 Voltage:DC12V/DC24V Non-dimmable
 Current:250mA
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:200-300lm
 CRI:Ra80/93
 Beam angle:15/30/60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black

Zoomable

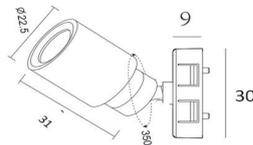


Model: Mini-Trak 102-2
 Wattage:2W
 Head rotary:355°
 Voltage:DC12V/DC24V Non-dimmable
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:120-150lm
 CRI:Ra80/93
 Beam angle:8-60° zoomable
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black


MINI TRACK LIGHT SERIES



Model: Mini-Trak 106-2
Wattage:1W
Head rotary:355°
Voltage:DC12V/DC24V Non-dimmable
LED Source:Osram LED
CCT:2700-6000k
Lumen:80lm
CRI:Ra80/93
Beam angle:15/25/45°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black




Model:Mini-Trak 100-2
Wattage:1W
Head rotary:355°
Voltage:DC12V/DC24V
LED Source:Osram LED
CCT:2700-6000k
Lumen:80lm
CRI:Ra80/93
Beam angle:15/25/45°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black




Model:Mini-Trak 110-2
Wattage:3W
Head rotary:355°
Voltage:DC12V/DC24V Non-dimmable
LED Source:Osram LED
CCT:2700-6000k
Lumen:165lm
CRI:Ra80/93
Beam angle:15/25/45°
IP:IP20
Material:Aluminum
Shell colour:Anodised silver/black

Zoomable




Model: Mini-Trak 111-2
 Wattage:1W
 Head rotary:355°
 Voltage:DC12V/DC24V Non-dimmable
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:80lm
 CRI:Ra80/93
 Beam angle:10-60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black

Zoomable






Model: Mini-Trak 115-2
 Wattage:3W
 Head rotary:355°
 Voltage:DC12V/DC24V Non-dimmable
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:175lm
 CRI:Ra80/93
 Beam angle:10-60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black



Zoomable




Model: Mini-Trak 113-2
 Wattage:3W
 Head rotary:355°
 Voltage:DC12V/DC24V Non-dimmable
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:180lm
 CRI:Ra80/93
 Beam angle:10-60°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black

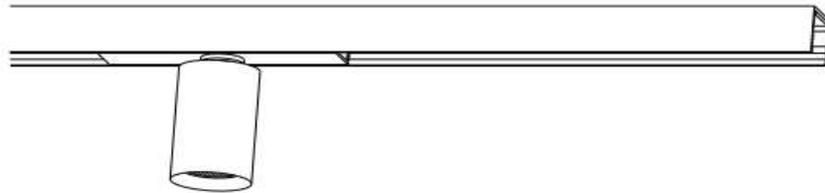

light*1

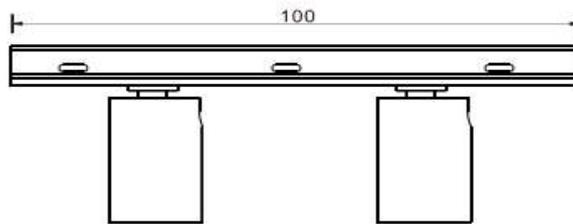


light*2

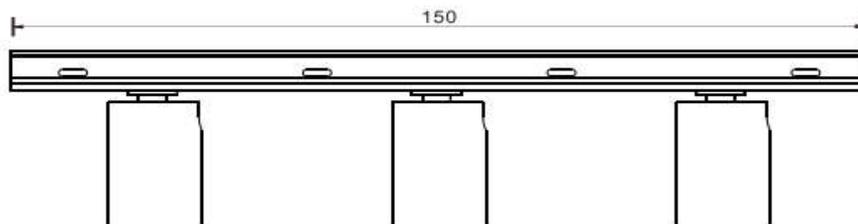


light*3


MICRO-LINE TRACK LIGHT SERIES



Model: Micro-Line Trak 10-00
 Wattage: 1W
 Head rotary: 355°
 Voltage:
 DC12-24V non-dimmable
 DC24V Dimmable
 CCT: 3000K/4000K/6000K
 Lumen: 80lm
 SDCM < 3
 CRI: Ra95
 Beam angle: 10/15/25/45°
 IP: IP20
 Dimmable: PWM/0-10V/Dali
 Material: Aluminum
 Shell colour: Anodised silver/black




Model: Micro-Line Trak 10-01
 Wattage: 1.5W
 Head rotary: 355°
 Voltage:
 DC12-24V non-dimmable
 DC24V Dimmable
 CCT: 3000K/4000K/6000K
 Lumen: 120lm
 SDCM < 3
 CRI: Ra95
 Beam angle: 15/25/45°
 IP: IP20
 Dimmable: PWM/0-10V/Dali
 Material: Aluminum
 Shell colour: Anodised silver/black

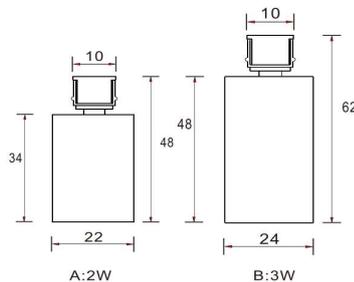


Model: Micro-Line Trak 10-02
 Wattage: 2W/3W
 Head rotary: 355°
 Voltage:
 DC12-24V non-dimmable
 DC24V Dimmable
 CCT: 3000K/4000K/6000K
 Lumen: 250lm
 SDCM < 3
 CRI: Ra95
 Beam angle: 5/15/25/45°
 IP: IP20
 Dimmable: PWM/0-10V/Dali
 Material: Aluminum
 Shell colour: Anodised silver/black


MICRO-LINE TRACK LIGHT SERIES




Model:Micro-Line Trak 10-04
 Wattage:5W
 Head rotary:355°
 Voltage:
 DC12-24V Non-dimmable DC24V Dimmable
 CCT:3000K/4000K/6000K
 Lumen:450lm
 SDCM<3
 CRI:Ra95
 Beam angle:5/15/25/45°
 IP:IP20
 Dimmable:PWM/0-10V/Dali
 Material:Aluminum
 Shell colour:Anodised silver/black




Model:Micro-Line Trak 10-03
 Wattage:3.5W
 Head rotary:355°
 Voltage:
 DC12-24V non-dimmable DC24V Dimmable
 CCT:3000K/4000K/6000K
 Lumen:300lm
 SDCM<3
 CRI:Ra95
 Beam angle:5/15/25/45°
 IP:IP20
 Dimmable:PWM/0-10V/Dali
 Material:Aluminum
 Shell colour:Anodised silver/black




Model:Micro-Line Trak 10-06
 Wattage:3W
 Head rotary:355°
 Voltage:
 DC12-24V non-dimmable DC24V Dimmable
 CCT:3000K/4000K/6000K
 Lumen:250lm
 SDCM<3
 CRI:Ra95
 Beam angle:5-60°
 IP:IP20
 Dimmable:PWM/0-10V/Dali
 Material:Aluminum
 Shell colour:Anodised silver/black




Model:Linear 2301
 Size:16*16mm/8*8mm
 Length:200-2000mm Custom made
 Voltage:DC12V/DC24V
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:100lm/W
 CRI:Ra80/93
 Beam angle:120°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black



Model:Linear 2302
 Size:10*10mm
 Length:200-2000mm Custom made
 Voltage:DC12V/DC24V
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:100lm/W
 CRI:Ra80/90
 Beam angle:120°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black




Model:Linear 2303
 Size:13*9mm
 Length:200-2000mm Custom made
 Voltage:DC12V/DC24V
 LED Source:Osram LED
 CCT:2700-6000k
 Lumen:100lm/W
 CRI:Ra80/90
 Beam angle:120°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black



Model:Linear 2301U
 Size:14*11.5mm
 Length:200-2000mm Custom made
 Voltage:DC12V/DC24V/AC110V LED
 Source:Osram LED
 CCT:2700-6000k
 Lumen:100lm/W
 CRI:Ra80/93
 Beam angle:90°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black



Model:Linear 016C
 Profile Size:Φ15mm
 Length:200-2000mm Custom made
 Voltage:DC12V/DC24V/AC110V LED
 Source:Osram LED
 CCT:2700-6000k
 Lumen:100lm/W
 CRI:Ra80/90
 Beam angle:90°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black/gold

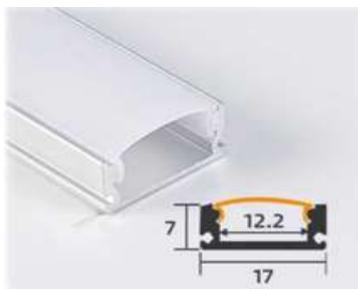

Model:Linear 2304
 Size:17*7mm
 Length:200-2000mm Custom made
 Voltage:DC12V/DC24V/AC110V LED
 Source:Osram LED
 CCT:2700-6000k
 Lumen:100lm/W
 CRI:Ra80/90
 Beam angle:120°
 IP:IP20
 Material:Aluminum
 Shell colour:Anodised silver/black

Award-Winning Lighting

Parify Lighting Ltd

14, The Courtyard, Whitwick Business Park,
Stenson Road, Coalville, Leicester,
Leicestershire,
LE67 4JP

Tel: 01509 323 111

Email: sales@parify.co.uk

Web: parifylighting.co.uk

